


XL marlin Lighting


Three Circuit Tracks - TR Type (TR2 Type) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: TR2
2. Rated Voltage: AC 230/240V
3. Rated Power: 16 A
4. IP Grade: IP20
5. Product Dimension: 2000*32.5*56mm



End cap




- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.



If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Surface Mounting Installation


1. CUT CEILING PANEL

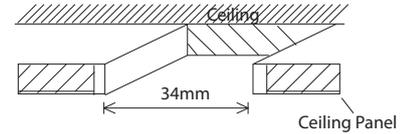


2. FIX THE TACK TO THE CEILING

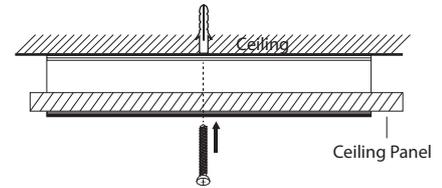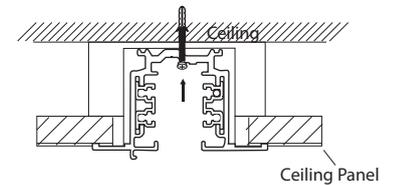


3. REMOVE LIVE END COVER



4. CONNECT THE CABLE . LIVE LINE FOR L TERMINAL, NULL LINE FOR N TERMINAL, GROUND LINE FOR E TERMINAL.

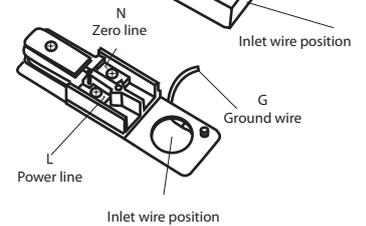

5. SLIDE LIVE END TO TRACK END



The light source of this luminaire is not replaceable; when the source reaches its end of life the whole luminaire shall be replaced

Welcome you again to buy our products