


# XL marlin Lighting


## Three Circuit Tracks - TR Type ( TR1 Type ) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: TR1
2. Rated Voltage: AC 230/240V
3. Rated Power: 16 A
4. IP Grade: IP20
5. Product Dimension: 1000\*32.5\*56mm



End cap




- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.


If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

### Surface Mounting Installation


#### 1. CUT CEILING PANEL

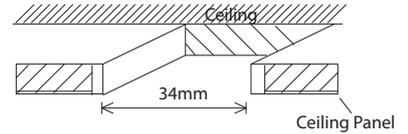

#### 2. FIX THE TACK TO THE CEILING

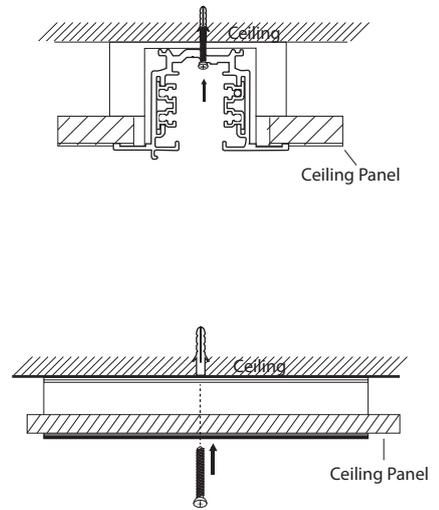

#### 3. REMOVE LIVE END COVER

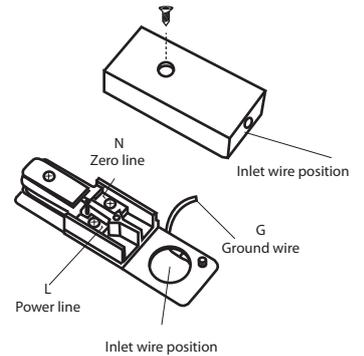

#### 4. CONNECT THE CABLE . LIVE LINE FOR L TERMINAL, NULL LINE FOR N TERMINAL, GROUND LINE FOR E TERMINAL.

#### 5. SLIDE LIVE END TO TRACK END

