


Model: SL24V14.4IP68



General Data

System Watts	14.4W
Voltage	24V
LED Distance	1.67cm
Roll Length	5m
Max to connect	1 Rolls
Cutting Distance	10 cm
PCB Colour	White
Lumen lm p/m	1320lm
Beam angle	120°
LED Type	5050
LED Qty p/m	60
Connection Type	Stripped wire
IP Rating	IP68

Dimension Drawing

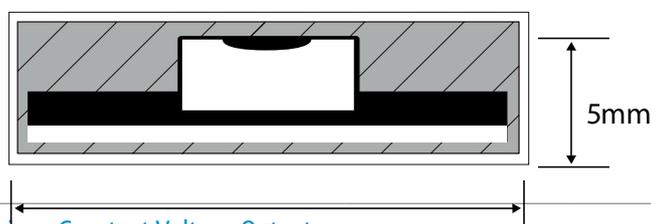

Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-100-24	100 W	IP 67	1 - 6 Meter Max	5 years
MW- XLG-240-24	240 W	IP 67	1 - 16 Meter Max	5 years
MW- ELG-100-24	100 W	IP 67	1 - 6 Meter Max	5 years
MW- ELG-300-24	300 W	IP 67	1 - 20 Meter Max	5 years

Driver: Constant Voltage Output

SRP-2108-24-100W	100 W	IP 20	1 - 6 Meter Max	5 years
SRP-2108-24-200W	200 W	IP 20	1 - 13 Meter Max	5 years

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.

PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and width, comes in 5 meters roll, with 3M adhesive tape.IP68

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP68. with 3M adhesive tape.

Strip light options

Color	Part Number	CCT
	SL24V14.4IP6827	2700K
	SL24V14.4IP683	3000K
	SL24V14.4IP684	4000K
	SL24V14.4IP686	6000K
	SL24V14.4IP68R	Red
	SL24V14.4IP68G	Green
	SL24V14.4IP68B	Blue

Color	Part Number	CCT
	SL24V14.4IP68RGB	Red Green Blue
	SL24V14.4IP68RGBW	Red Green Blue White
	SL24V14.4IP68CW	Cool White Warm White

- Driver to be order separately
- Cable distance should be taken into consideration.