


Model: OLEC95A

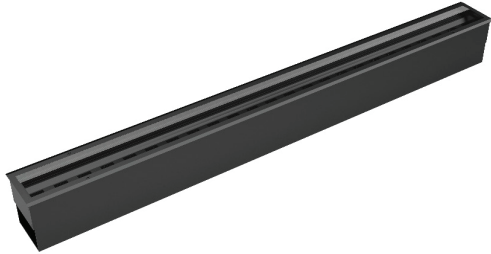


LAMP DATA

CODE	OLEC95AM	OLEC95AL
Dimension	1010x95x105mm	
Cutout	1005x85x105mm	
Power	60W	75W
Lumin	80lm/W	
CCT	3000K/4000K/RGBW	
Beam angle	10°, 20°, 40°, 60°, 10x20°, 10x60°, 30x60°	
Control	ON-OFF /DMX512	
Input voltage	AC100-240V 50/60hz	
LED type	Cree LED	
CRI	<90	
Lamp Life	50000 hrs	
SDCM	≤5	
Oper. Temp.	-30~50°C	
Certifications	CE, RoHS	
Fixing clip	Aluminum housing pre-buried	

Construction Data

IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminum alloy
Gasket	Silicone rubber
Screw	Stainless steel
Glass	Tempered Glass.
Cable	5 pins rubber cable(power cable 1.0 mm ² ,signal cable 0.3mm ²)

Photometric Data

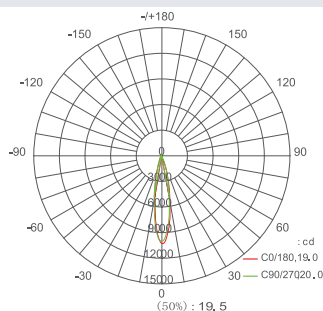

APPLICATIONS

This is a product designed to be Recessed in the riser of wall. It is characterized by the complete absence of glare thanks to a positioning system of the light source, purposely engineered for the best control and downward orientation of light, safety and the visible comfort are totally guaranteed.

PRODUCT DESCRIPTION

In ground recessed Linear luminaire for outdoor installation, anodized extruded aluminium body, tempered glass diffuser, stainless steel housing trim. , IP67

FIXTURE CONSTRUCTION

Aluminum housing pre-buried, solid passivated (anodizing) Aluminum Case , with Step tempered Glass., silicone seal gasket and cable gland for waterproof IP67, with 150mm Cable length, 5 pins rubber cable(power cable 1.0 mm²,signal cable 0.3mm²)

Lamp Options

Lamp Options 60W OLEC95AM

Part Number	CCT	Beam
OLEC95AMC3B10	3000 K	10°
OLEC95AMC4B10	4000 K	10°
OLEC95AMCRGBWB10	RGBW	10°
OLEC95AMC3B20	3000 K	20°
OLEC95AMC4B20	4000 K	20°
OLEC95AMCRGBWB20	RGBW	20°
OLEC95AMC3B40	3000 K	40°
OLEC95AMC4B40	4000 K	40°
OLEC95AMCRGBWB40	RGBW	40°
OLEC95AMC3B60	3000 K	60°
OLEC95AMC4B60	4000 K	60°
OLEC95AMCRGBWB60	RGBW	60°
OLEC95AMC3B10x20	3000 K	10x20°
OLEC95AMC4B10x20	4000 K	10x20°
OLEC95AMCRGBWB10x20	RGBW	10x20°
OLEC95AMC3B10x60	3000 K	10x60°
OLEC95AMC4B10x60	4000 K	10x60°
OLEC95AMCRGBWB10x60	RGBW	10x60°
OLEC95AMC3B30x60	3000 K	30x60°
OLEC95AMC4B30x60	4000 K	30x60°
OLEC95AMCRGBWB30x60	RGBW	30x60°

Lamp Options 75W OLEC95AL

Part Number	CCT	Beam
OLEC95ALC3B10	3000 K	10°
OLEC95ALC4B10	4000 K	10°
OLEC95ALCRGBWB10	RGBW	10°
OLEC95ALC3B20	3000 K	20°
OLEC95ALC4B20	4000 K	20°
OLEC95ALCRGBWB20	RGBW	20°
OLEC95ALC3B40	3000 K	40°
OLEC95ALC4B40	4000 K	40°
OLEC95ALCRGBWB40	RGBW	40°
OLEC95ALC3B60	3000 K	60°
OLEC95ALC4B60	4000 K	60°
OLEC95ALCRGBWB60	RGBW	60°
OLEC95ALC3B10x20	3000 K	10x20°
OLEC95ALC4B10x20	4000 K	10x20°
OLEC95ALCRGBWB10x20	RGBW	10x20°
OLEC95ALC3B10x60	3000 K	10x60°
OLEC95ALC4B10x60	4000 K	10x60°
OLEC95ALCRGBWB10x60	RGBW	10x60°
OLEC95ALC3B30x60	3000 K	30x60°
OLEC95ALC4B30x60	4000 K	30x60°
OLEC95ALCRGBWB30x60	RGBW	30x60°

Special optics or beam angles can be customized to customer request.

Dimensions

