

Model: OLB033073



General Data

Power	8 W
LED type	COB
Luminous flux	690 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	38°
Dimension	Ø108x150mm
Cut out dia.	/
Weight (kgs)	1.84 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

Construction Data

IP rating	65 waterproof
Housing	Solid aluminum housing CNC machined body
Protection finishing	passivated (anodizing) anti-corrosion finishing
Glass	Tempered glass diffuser
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	AC 220~240V
Cable	Cable gland for waterproof IP65

Accessories

Mounting Sleeve	/
Clip	/

APPLICATIONS

These lights are suitable for both indoor and outdoor applications, such as shopping centers, food courts, lobbies, canopies, transportation hubs, multi-story commercial buildings, as well as parking lots, etc.


PRODUCT DESCRIPTION

Surface-mounted ceiling luminaire for outdoor installation, aluminum body, glass diffuser, stainless steel screws, Low power COB LED, IP65 rating.

FIXTURE CONSTRUCTION

Solid aluminum housing CNC machined body, with passivated (anodizing) anti-corrosion finishing, Step Tempered glass. Silicone gasket and cable gland for a waterproof IP65 rating

Dimension Drawing

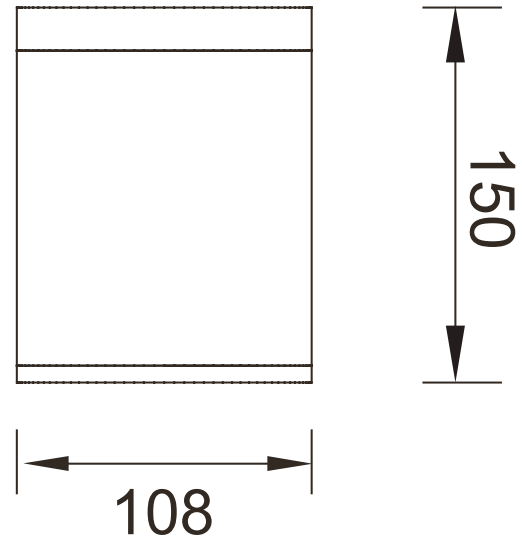


Lamp Options

Part Number	CCT	Beam angle
OLB033073C3B38	3000 K	38°
OLB033073C4B38	4000 K	38°

Photometric Data

Light Distribution Curve

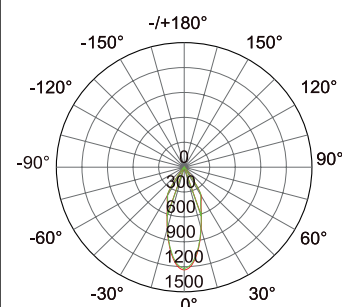

Illumination Drawing

