

XL marlin Lighting

GARDEN Urban lighting

Model: OLPFU



General Data

Power	35W/60W
LED type	Cree, Osram LED
Luminous flux	120 lm/W
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	70/80
Beam angle	90° / Asymmetrical
Dimension	Ø490x 550mm
Lamp Life	50000 hrs
SDCM	≤5
Body colour	Grey, Black
Oper. Temp.	-30 °C up to +50 °C
Certifications	CE, RoHS
Input voltage	AC 100-270V, 50/60Hz

Construction Data

IP rating	IP65 Waterproof
Installation Pipe	Ø60/76mm
Housing	Aluminum lamp body
Housing finish	Polyester powder coating
Optic	Polycarbonate
Impact resistance	IK 08
Protector	Tempered glass
Driver	Meanwell

Pole options (Black)


(Black)

Part Number	Pole Length
OLP400B	4000mm
OLP500B	5000mm
OLP600B	6000mm

(Grey)

Part Number	Pole Length
OLP400G	4000mm
OLP500G	5000mm
OLP600G	6000mm

Photometric Data

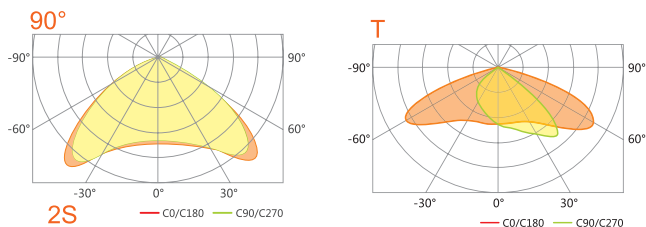

APPLICATIONS

Simple appearance, easy to integrate with the environment. Specially designed for squares, parks and gardens areas.

PRODUCT DESCRIPTION

Reinforced die-casting body and reflector, smooth self-cleaning surface, nice appearance design And strong structure design. High efficient integrated heat radiation design, Electrostatic powder painting, high strength anti-corrosion, long lifespan. Plug type waterproof design, Waterproof more durable and effectively, Up to IP65.

FIXTURE CONSTRUCTION

Aluminium lamp body; Polycarbonate Optic, Polyester powder coating Housing finish with Tempered glass Protector, Meanwell Driver band and IP65

Symetrical Beam angle

Lamp options (Black)

Part Number	Watts	CCT
OLPFUS35WC3B	35W	3000K
OLPFUS35WC4B	35W	4000K
OLPFUS60WC3B	60W	3000K
OLPFUS60WC4B	60W	4000K

Lamp options (Grey)

Part Number	Watts	CCT
OLPFUS35WC3G	35W	3000K
OLPFUS35WC4G	35W	4000K
OLPFUS60WC3G	60W	3000K
OLPFUS60WC4G	60W	4000K

Asymmetrical Beam angle


Lamp options (Black)

Part Number	Watts	CCT
OLPFUA35WC3SB	35W	3000K
OLPFUA35WC4SB	35W	4000K
OLPFUA60WC3SB	60W	3000K
OLPFUA60WC4SB	60W	4000K

Lamp options (Grey)

Part Number	Watts	CCT
OLPFUA35WC3SG	35W	3000K
OLPFUA35WC4SG	35W	4000K
OLPFUA60WC3SG	60W	3000K
OLPFUA60WC4SG	60W <td 4000K	

POLE Length

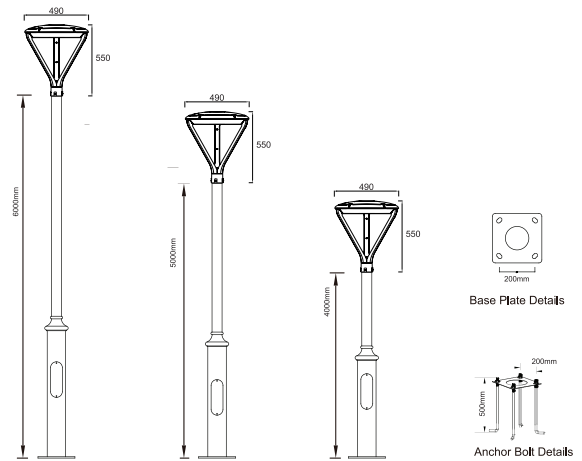

Dimension Drawing

