


Model: XLL500SPD

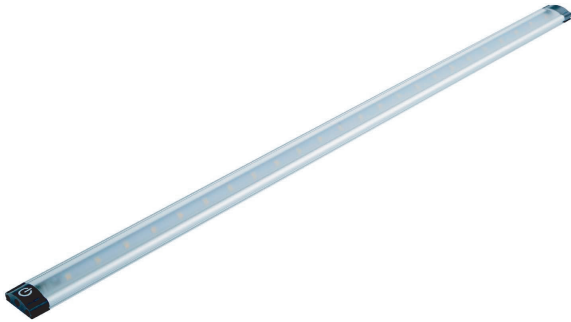

General Data

Lamp Type	CREE SMD2835
System Watts	5.5 W
Lumens	449lm
Lamp Life	25,000 hrs
CRI	CRI >80 Ra
Beam Angle	90°
IP Rating	IP 20
Voltage	12 V
Dimming	Available on request
CCT	3000/4000K
Oper. temp.	-20 to +40
Dimension	500x25x9mm

Construction Data

IP rating	20 Indoor
Housing	Polished Chrome or White Aluminum base
Protection finishing	/
Glass	PC cover
Loading capacity	/
Cable Gland	IP20
Gasket	/

Electrical Data

Input voltage	DC 12V
Cable	/

Accessories

Mounted Accessory	/
Clip	/

APPLICATIONS

cabinet lighting very efficient use of light. The fact that under cabinet lighting directs light to where it is needed (i.e. kitchen counter) without much "wasted" light that spills over across the room.


PRODUCT DESCRIPTION

Slim automatic/pir/touch switch aluminium plastic cover led indoor kitchen under cabinet light.

FIXTURE CONSTRUCTION

aluminium with plastic cover. With Knob switch.

Dimension Drawing

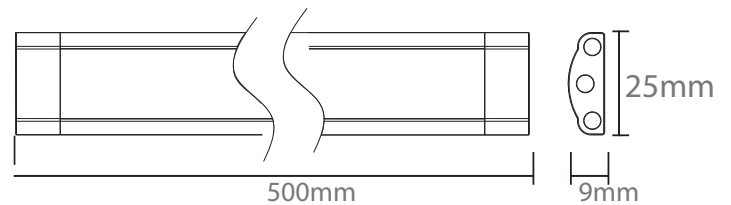

Lamp Options

Part Number	CCT	Lamp colorT
XLL500SPD3WH	3000 K	White
XLL500SPD4WH	4000 K	White
XLL500SPD3CH	3000 K	Chrome
XLL500SPD4CH	4000 K	Chrome