

Model: OLWWYS118
Larg Structure Design




Construction Data

LED type	OSRAM
IP rating	IP66 Waterproof
IK rating	IK08
Housing	Aluminum housing
Gasket	Silicone rubber
Glass	Tempered Glass.
Operatin temperature	-30°C-50°C
Cable Gland	H05RN-F
Gasket	PMQ silicone seal

Electrical Data

Input voltage	AC100-240V 50/60hz - (For 300mm DC24V)
Control	ON/OFF / DMX / RDM / DALI / 0-10V
Cable	IP68 Male female connectors

Photometric Data RGBW 48W 15°

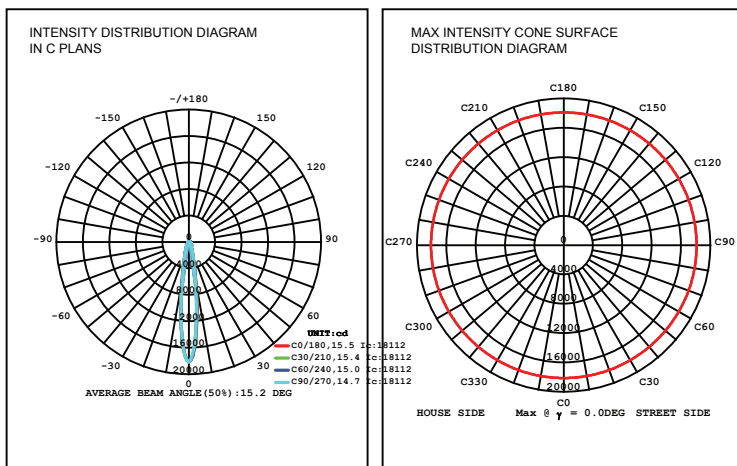

APPLICATIONS


These lights are used in exterior applications, such as Facade lighting, architectural features, lighting columns, walls, as well as landscape features, gardens, parks, etc.

PRODUCT DESCRIPTION


Surface-mounted linear slim wall washer luminaire for outdoor installation,, length 1000mm/ 500mm and 300mm, Aluminum alloy body housing. Low power OSRAM LED, with DMX / RDM / DALI / 0-10V Control Options, IP66 rated

FIXTURE CONSTRUCTION


Extrude aluminum Powder coated body with tempered glass and Angle Bracket Adjustable with Stainless steel Screws , silicone gasket seal and H 05RN-F cables with waterproof connector male + female IP66 rated.

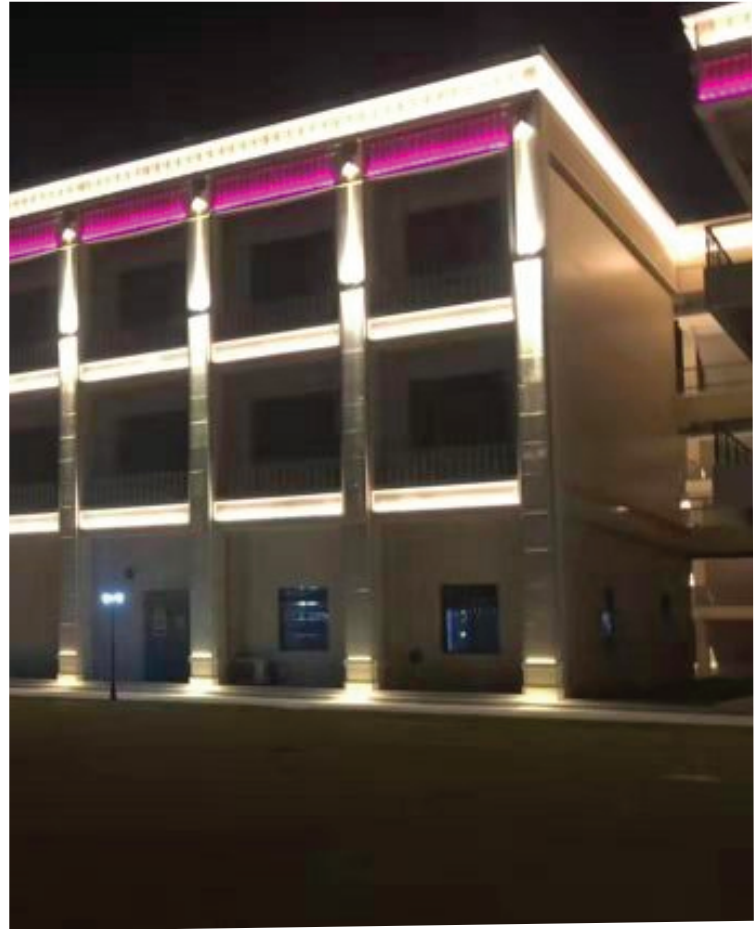

Dimension

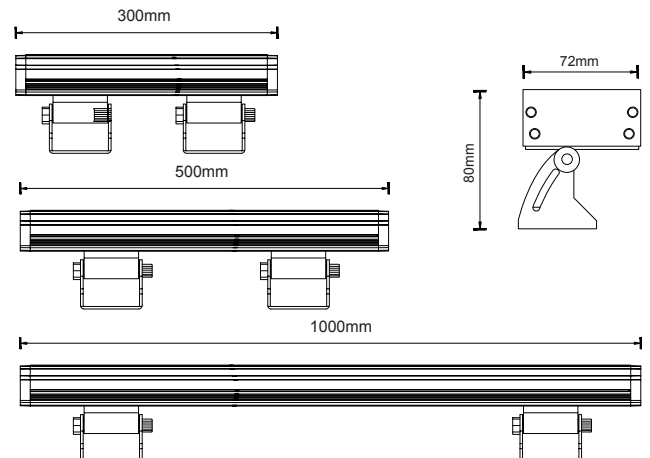

Model: OLWWYS118 Large
Larg Structure Design 1000mm

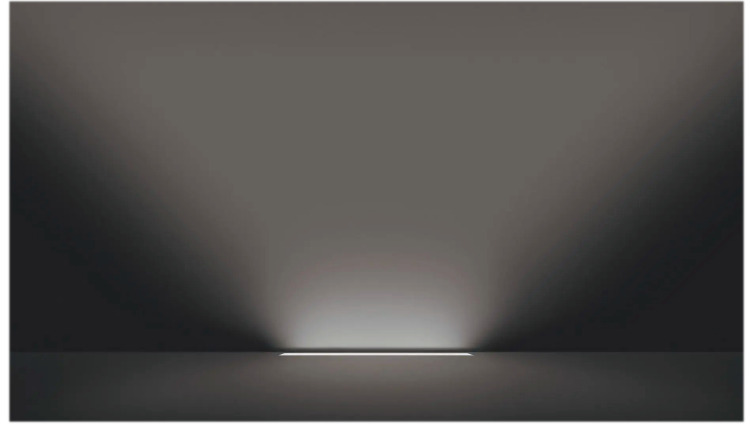

LAMP DATA


Type	Larg
Power	72W
RGB/RGBW Power	80W
LED type	OSRAM LED
3000K/4000K Luminous flux	5760lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	3°/5°/8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	1000x80x72mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS

Lamp Options Large 1000mm OLWWYS118L


Part Number	CCT	Beam
OLWWYS118LC3B3	3000 K	3°
OLWWYS118LC4B3	4000 K	3°
OLWWYS118LC3B5	3000 K	5°
OLWWYS118LC4B5	4000 K	5°
OLWWYS118LC3B8	3000 K	8°
OLWWYS118LC4B8	4000 K	8°
OLWWYS118LC3B15	3000 K	15°
OLWWYS118LC4B15	4000 K	15°
OLWWYS118LCRGGBB15	RGB	15°
OLWWYS118LCRGGWB15	RGBW	15°
OLWWYS118LC3B30	3000 K	30°
OLWWYS118LC4B30	4000 K	30°
OLWWYS118LCRGGBB30	RGB	30°
OLWWYS118LCRGGWB30	RGBW	30°
OLWWYS118LC3B45	3000 K	45°
OLWWYS118LC4B45	4000 K	45°
OLWWYS118LCRGGBB45	RGB	45°
OLWWYS118LCRGGWB45	RGBW	45°
OLWWYS118LC3B20X60	3000 K	20X60°
OLWWYS118LC4B20X60	4000 K	20X60°
OLWWYS118LCRGGBB20X60	RGB	20X60°
OLWWYS118LCRGGWB20X60	RGBW	20X60°



LAMP Dimension

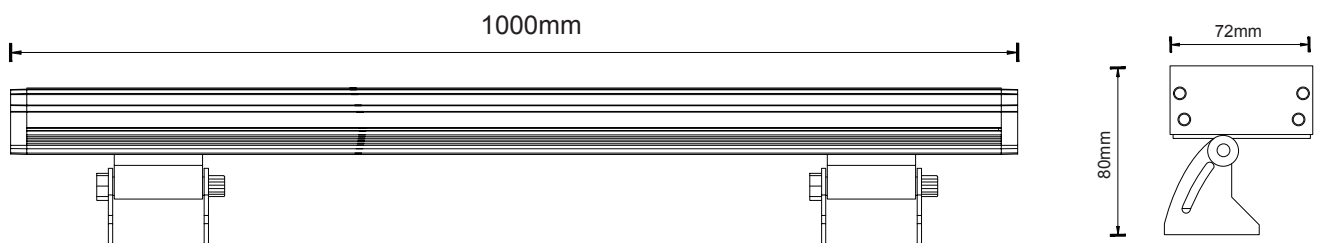

Model: OLWWYS118 Medium
Larg Structure Design 500mm

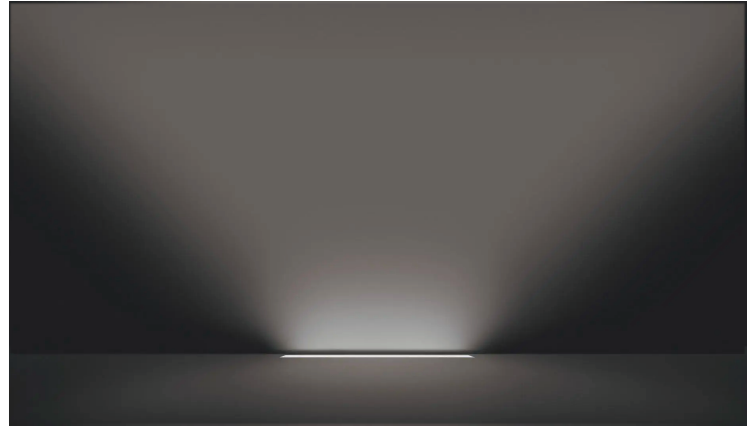

LAMP DATA


Type	Medium
Power	36W
RGB/RGBW Power	40W
LED type	OSRAM LED
3000K/4000K Luminous flux	2880lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	3°/5°/8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	500x80x72mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS

Lamp Options Medium 500mm OLWWYS118M


Part Number	CCT	Beam
OLWWYS118MC3B3	3000 K	3°
OLWWYS118MC4B3	4000 K	3°
OLWWYS118MC3B5	3000 K	5°
OLWWYS118MC4B5	4000 K	5°
OLWWYS118MC3B8	3000 K	8°
OLWWYS118MC4B8	4000 K	8°
OLWWYS118MC3B15	3000 K	15°
OLWWYS118MC4B15	4000 K	15°
OLWWYS118MCRGBB15	RGB	15°
OLWWYS118MCRGBWB15	RGBW	15°
OLWWYS118MC3B30	3000 K	30°
OLWWYS118MC4B30	4000 K	30°
OLWWYS118MCRGBB30	RGB	30°
OLWWYS118MCRGBWB30	RGBW	30°
OLWWYS118MC3B45	3000 K	45°
OLWWYS118MC4B45	4000 K	45°
OLWWYS118MCRGBB45	RGB	45°
OLWWYS118MCRGBWB45	RGBW	45°
OLWWYS118MC3B20X60	3000 K	20X60°
OLWWYS118MC4B20X60	4000 K	20X60°
OLWWYS118MCRGBB20X60	RGB	20X60°
OLWWYS118MCRGBWB20X60	RGBW	20X60°



LAMP Dimension

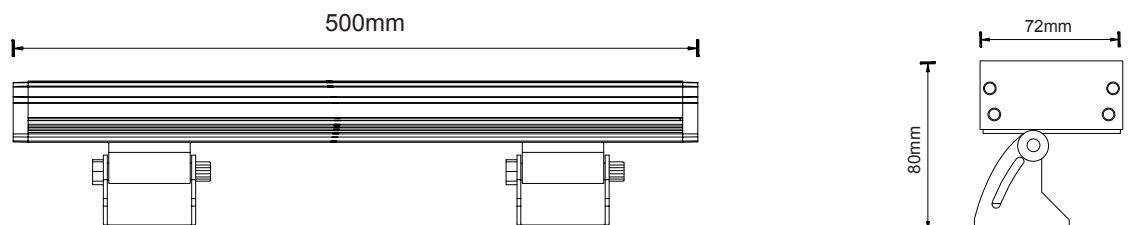

Model: OLWWYS118 Small Larg Structure Design 300mm

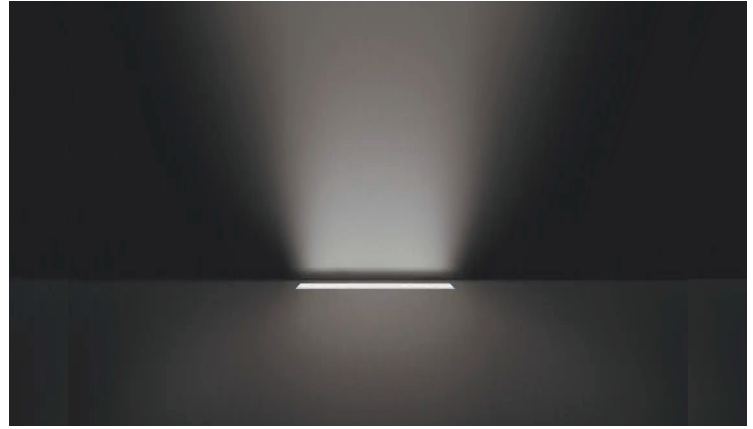

LAMP DATA

Type	Small
Power	18W
RGB/RGBW Power	20W
LED type	OSRAM LED
3000K/4000K Luminous flux	1440lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	3°/5°/8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	300x80x72mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS

Lamp Options Small 300mm OLWWYS118S

Part Number	CCT	Beam
OLWWYS118SC3B3	3000 K	3°
OLWWYS118SC4B3	4000 K	3°
OLWWYS118SC3B5	3000 K	5°
OLWWYS118SC4B5	4000 K	5°
OLWWYS118SC3B8	3000 K	8°
OLWWYS118SC4B8	4000 K	8°
OLWWYS118SC3B15	3000 K	15°
OLWWYS118SC4B15	4000 K	15°
OLWWYS118SCRGBB15	RGB	15°
OLWWYS118SCRGBWB15	RGBW	15°
OLWWYS118SC3B30	3000 K	30°
OLWWYS118SC4B30	4000 K	30°
OLWWYS118SCRGBB30	RGB	30°
OLWWYS118SCRGBWB30	RGBW	30°
OLWWYS118SC3B45	3000 K	45°
OLWWYS118SC4B45	4000 K	45°
OLWWYS118SCRGBB45	RGB	45°
OLWWYS118SCRGBWB45	RGBW	45°
OLWWYS118SC3B20X60	3000 K	20X60°
OLWWYS118SC4B20X60	4000 K	20X60°
OLWWYS118SCRGBB20X60	RGB	20X60°
OLWWYS118SCRGBWB20X60	RGBW	20X60°



LAMP Dimension

