

**Model: OLB803492**



**General Data**

Power	30 W
LED type	15WX2 COB LED
Luminous flux	2700 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	90°x2
Dimension	300x150x207mm
Cut out dia.	/
Weight (kgs)	1.5 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

**Construction Data**

IP rating	IP65 Waterproof
Housing	Cast aluminum body
Protection finishing	Graphene powder coating finish
Glass	Tempered glass
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

**Electrical Data**

Input voltage	AC110~240V
Cable	Cable gland for waterproof IP65

**APPLICATIONS**

These lights are widely used in exterior applications, such as Facade lighting, columns, walls, architectural features, landscape features for hotels, as well as residential applications, etc.

**PRODUCT DESCRIPTION**

Surface-mounted wall luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power COB LED, IP65 rating.

**FIXTURE CONSTRUCTION**


Cast aluminum body, with passivated (anodizing) anticorrosion finishing, stainless steel screws, silicon seal gaskets and cable gland for waterproof IP65

**Accessories**

Mounting Sleeve /

Clip /

**Dimension Drawing**

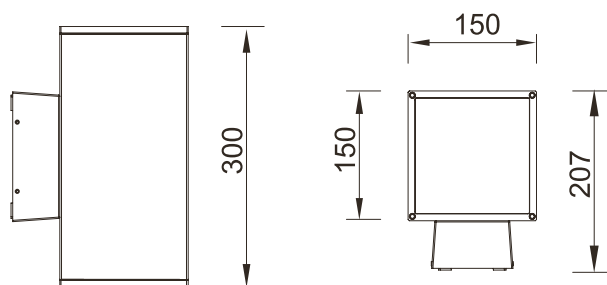


**Lamp Options**

Part Number	CCT	Beam angle
OLB803492C3B90	3000 K	90°x2
OLB803492C4B90	4000 K	90° x2

**Photometric Data**

Light Distribution Curve [Unit: cd]



Illumination Drawing

