

# XL marlin Lighting

## GARDEN Urban lighting

### Model: OLPCZ



#### General Data

<b>Power</b>	60W/80W/120W
<b>LED type</b>	Cree, Osram LED
<b>Luminous flux</b>	105 lm/W
<b>CCT</b>	3000K or 4000K as standard. Different CCT upon request.
<b>CRI</b>	70/80
<b>Beam angle</b>	90°/ Asymmetrical
<b>Dimension</b>	1900x150x3000mm / 1900x150x4000mm /
<b>Lamp Life</b>	50000 hrs
<b>SDCM</b>	≤5
<b>Body colour</b>	Grey, Black
<b>Oper. Temp.</b>	-30 °C up to +50 °C
<b>Certifications</b>	CE, RoHS
<b>Input voltage</b>	AC 100-270V, 50/60Hz

#### Construction Data

<b>IP rating</b>	IP65 Waterproof
<b>Housing</b>	Aluminum lamp body
<b>Housing finish</b>	Polyester powder coating
<b>Optic</b>	Polycarbonate
<b>Impact resistance</b>	IK 08
<b>Protector</b>	Tempered glass
<b>Driver</b>	Meanwell

#### Pole options (Black)


##### (Black)

Part Number	Pole Length
<b>OLPS300B</b>	3000mm
<b>OLPS400B</b>	4000mm

##### (Grey)

Part Number	Pole Length
<b>OLPS300G</b>	3000mm
<b>OLPS400G</b>	4000mm

#### Photometric Data

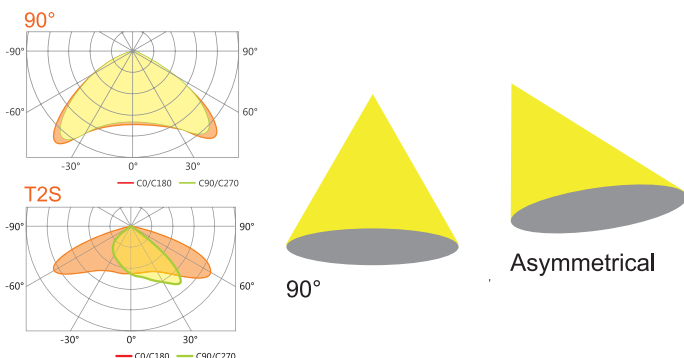

#### APPLICATIONS

Simple appearance, easy to integrate with the environment. Specially designed for squares, parks and gardens areas.

#### PRODUCT DESCRIPTION

Reinforced die-casting body and reflector, smooth self-cleaning surface, nice appearance design And strong structure design. High efficient integrated heat radiation design, Electrostatic powder painting, high strength anti-corrosion, long lifespan. Plug type waterproof design, Waterproof more durable and effectively, Up to IP65.

#### FIXTURE CONSTRUCTION

Aluminium lamp body; Polycarbonate Optic, Polyester powder coating Housing finish with Tempered glass Protector, Meanwell Driver band and IP65

#### Symetrical Beam angle

##### Lamp options (Black)

Part Number	Watts	CCT
<b>OLPCZS60WC3B</b>	60W	3000K
<b>OLPCZS60WC4B</b>	60W	4000K
<b>OLPCZS80WC3B</b>	80W	3000K
<b>OLPCZS80WC4B</b>	80W	4000K
<b>OLPCZS120WC3B</b>	120W	3000K
<b>OLPCZS120WC4B</b>	120W	4000K

##### Lamp options (Grey)

Part Number	Watts	CCT
<b>OLPCZS60WC3G</b>	60W	3000K
<b>OLPCZS60WC4G</b>	60W	4000K
<b>OLPCZS80WC3G</b>	80W	3000K
<b>OLPCZS80WC4G</b>	80W	4000K
<b>OLPCZS120WC3G</b>	120W	3000K
<b>OLPCZS120WC4G</b>	120W	4000K

#### Asymmetrical Beam angle

##### Lamp options (Black)

Part Number	Watts	CCT
<b>OLPCA60WC3B</b>	35W	3000K
<b>OLPCA60WC4B</b>	35W	4000K
<b>OLPCA80WC3B</b>	60W	3000K
<b>OLPCA80WC4B</b>	60W	4000K
<b>OLPCA120WC3B</b>	100W	3000K
<b>OLPCA120WC4B</b>	100W	4000K

##### Lamp options (Grey)

Part Number	Watts	CCT
<b>OLPCA60WC3G</b>	35W	3000K
<b>OLPCA60WC4G</b>	35W	4000K
<b>OLPCA80WC3G</b>	60W	3000K
<b>OLPCA80WC4G</b>	60W	4000K
<b>OLPCA120WC3G</b>	100W	3000K
<b>OLPCA120WC4G</b>	100W	4000K

#### POLE Length

