

Model: S4 Surface Mounted Accessory



General Data

IP Rating	20/44/65
Beam angle	40°/60°/90°
Product Dimension	Ø100 x 100 mm

Surface Mounted Accessory For

APPLICATIONS

Ideal for general lighting in retail, commercial and domestic applications. Particularly suitable where glare can be an issue because this light fixture has very low glare index.


PRODUCT DESCRIPTION

Prolux surface mounted downlight is brilliant downlight for general lighting, made of die cast aluminium body

FIXTURE CONSTRUCTION

Die cast aluminium cylinder easy to install using screw arrangements for fixing from below, that can be fitted with the same type of downlight converting it to surface mounted fixture.

Dimension Drawing

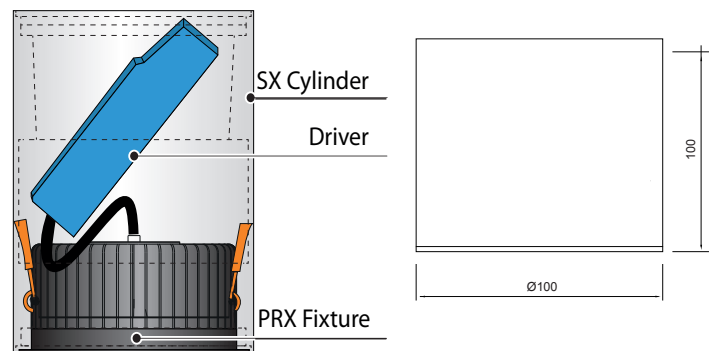

PRS4S12IP44WHX



PRS4S12IP65WHX



PRS4S12IP20WHX



PRS4F10IP65WHX



PRS4F10IP20WHX



PRS4F10IP44WHX

Model: S5 Surface Mounted Accessory



General Data

IP Rating	20/44/65
Beam angle	40°/60°/90°
Product Dimension	Ø147 x 150

Surface Mounted Accessory For

APPLICATIONS

Ideal for general lighting in retail, commercial and domestic applications. Particularly suitable where glare can be an issue because this light fixture has very low glare index.


PRODUCT DESCRIPTION

Prolux surface mounted downlight is brilliant downlight for general lighting, made of die cast aluminium body

FIXTURE CONSTRUCTION

Die cast aluminium cylinder easy to install using screw arrangements for fixing from below, that can be fitted with the same type of downlight converting it to surface mounted fixture.

Dimension Drawing

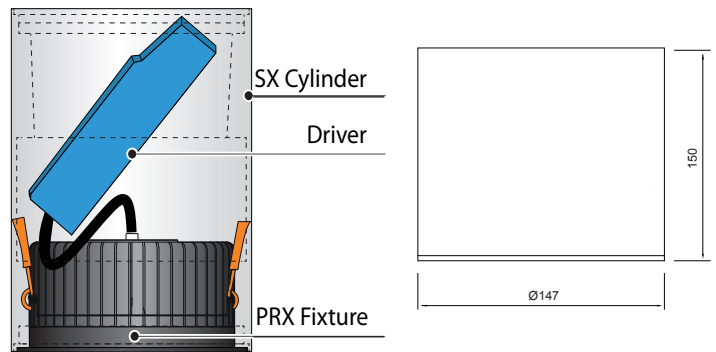

PR5S21IP44WHX



PR5S21IP65WHX



PR5S21IP20WHX



PR5F17IP65WHX



PR5F17IP20WHX



PR5F17IP44WHX

Model: S6 Surface Mounted Accessory



General Data

IP Rating	20/44/65
Beam angle	40°/60°/90°
Product Dimension	Ø197 x 200

Surface Mounted Accessory For

APPLICATIONS

Ideal for general lighting in retail, commercial and domestic applications. Particularly suitable where glare can be an issue because this light fixture has very low glare index.


PRODUCT DESCRIPTION

Prolux surface mounted downlight is brilliant downlight for general lighting, made of die cast aluminium body

FIXTURE CONSTRUCTION

Die cast aluminium cylinder easy to install using screw arrangements for fixing from below, that can be fitted with the same type of downlight converting it to surface mounted fixture.

Dimension Drawing

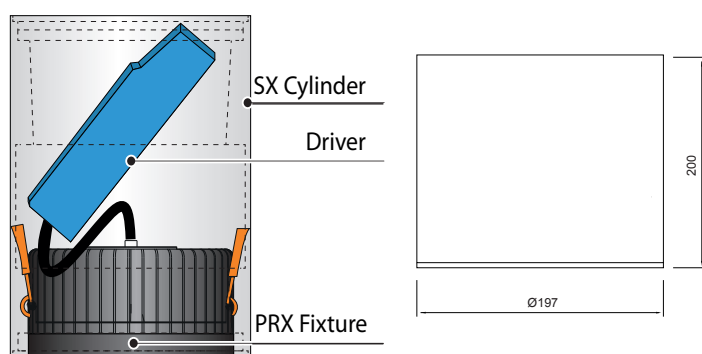

PRS6G26IP44WHX



PRS6G17IP44WHX



PRS6S26IP65WHX



PRS6S26IP20WHX



PRS6F26IP20WHX



PRS6S38IP65WHX



PRS6F26IP44WHX



PRS6F26IP65WHX



PRS6S26IP44WHX



PRS6F38IP44WHX



PRS6F38IP65WHX



PRS6F38IP20WHX

Model: S8 Surface Mounted Accessory



General Data

IP Rating	20/44/65
Beam angle	40°/60°/90°
Product Dimension	Ø230 x 200

Surface Mounted Accessory For

APPLICATIONS

Ideal for general lighting in retail, commercial and domestic applications. Particularly suitable where glare can be an issue because this light fixture has very low glare index.

PRODUCT DESCRIPTION

Prolux surface mounted downlight is brilliant downlight for general lighting, made of die cast aluminium body

FIXTURE CONSTRUCTION

Die cast aluminium cylinder easy to install using screw arrangements for fixing from below, that can be fitted with the same type of downlight converting it to surface mounted fixture.

Dimension Drawing

