


Model: XLHB200WME

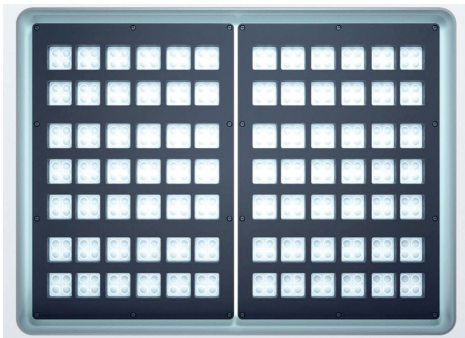

General Data

Power	200 W
LED type	Cree/Philips
Luminous flux	160L/W
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	80°/110° or Asymmetric 30x90°
Dimension	720x365x130
Cut out dia.	/
Lamp Life	50000 hrs
SDCM	≤5
Oper. Temp.	-40~50°C
Certifications	CE, RoHS

Construction Data

IP rating	65 waterproof
Housing	Die-cast Aluminum
Protection finishing	OTP,OCP,OVP,SCP
Glass	Tempered glass diffuser
Loading capacity	/
Cable Gland	IP66
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	AC220-240V, 50/60Hz
Cable	Cable gland for waterproof IP65
Driver	Meanwell
Control Option	PWM, DALI, 0/1~10V, Mico-wave

APPLICATIONS

Suitable for Warehouses, Workshops, Gymnasiums, Gas Stations, Toll Stations, Supermarkets, Exhibition halls and, many other Industrial and commercial lighting applications.


PRODUCT DESCRIPTION

LED Hilux Anti-glare High Bay Light, 5 years warranty, Philips Cree LED, Meanwell Driver, Diecast Aluminum body Multiple optical lens options. Available in multiple dimming options such as Dali, PWM, and 1-10V Dimming

FIXTURE CONSTRUCTION

Die-cast Aluminum body, Protection OTP,OCP,OVP,SCP, With Meanwell Driver IP65

Dimension Drawing

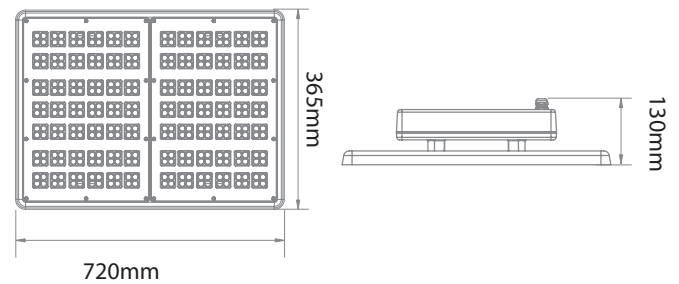


Lamp Options

Part Number	CCT	Beam angle
XLHB200WMEC3B80	3000 K	80°
XLHB200WMEC4B80	4000 K	80°
XLHB200WMEC5B80	5000 K	80°
XLHB200WMEC3B110	3000 K	110°
XLHB200WMEC4B110	4000 K	110°
XLHB200WMEC5B110	5000 K	110°
XLHB200WMEC3B3090	3000 K	30x90°
XLHB200WMEC4B3090	4000 K	30x90°
XLHB200WMEC5B3090	5000 K	30x90°

Accessories




Suspension clip for ceiling



Angle Bracket



1.1m length, with 1pc hanging ring, 2pcs per set



Mounting Bracket for fitting two lights together

Photometric Data

