


Model: XLMTSX



General Data

Model	XLMTSX5	XLMTSX10	XLMTSX15
System Watts	5W	10W	15W
Beam angle	24°/34°/50°	24°/36°/60°	24°/34°/50°
Lamp Lumens	85-100lm/w		
Dimensions mm	ø40x160x100	ø40x160x146	ø50x160x146
Lamp Type	COB		
CRI	≥90		
Lamp Life	50000 hrs		
IP Rating	20		
Input voltage (V)	48V-50/60Hz		
Body Color	White/black		
CCT	3000K/4000K		

Dimension

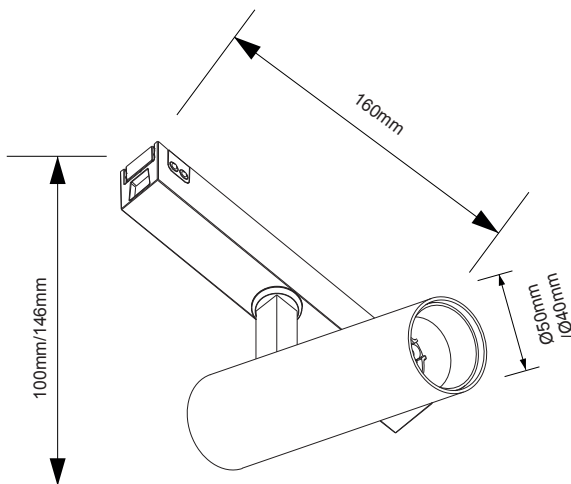

APPLICATIONS

Ideal for application where comfort and nice atmosphere is required. Its widely applied to retail lighting and other high-end commercial areas.

PRODUCT DESCRIPTION

5W/10W or 15W Magnetic Spot Light. Easy installation and removal from track. Optimal thermal dissipation. adjustable up to 350° and up to 90° vertically. CCT, 3000K, 4000K, and multiple beam angles.

FIXTURE CONSTRUCTION

Made of die cast aluminum body and heat sink and aluminum reflector. The adaptor locks the spotlight positively to the track, LED light source. comes in white, black.

5W White Lamp Options

Part Number	CCT	B. angle
XLMTSX5C3B24WH	3000 K	24°
XLMTSX5C4B24WH	4000 K	24°
XLMTSX5C3B34WH	3000 K	34°
XLMTSX5C4B34WH	4000 K	34°
XLMTSX5C3B50WH	3000 K	50°
XLMTSX5C4B50WH	4000 K	50°

5W Black Lamp Options

Part Number	CCT	B. angle
XLMTSX5C3B24BL	3000 K	24°
XLMTSX5C4B24BL	4000 K	24°
XLMTSX5C3B34BL	3000 K	34°
XLMTSX5C4B34BL	4000 K	34°
XLMTSX5C3B50BL	3000 K	50°
XLMTSX5C4B50BL	4000 K	50°

10W White Lamp Options

Part Number	CCT	B. angle
XLMTSX10C3B24WH	3000 K	24°
XLMTSX10C4B24WH	4000 K	24°
XLMTSX10C3B36WH	3000 K	36°
XLMTSX10C4B36WH	4000 K	36°
XLMTSX10C3B60WH	3000 K	60°
XLMTSX10C4B60WH	4000 K	60°

10W Black Lamp Options

Part Number	CCT	B. angle
XLMTSX10C3B24BL	3000 K	24°
XLMTSX10C4B24BL	4000 K	24°
XLMTSX10C3B36BL	3000 K	36°
XLMTSX10C4B36BL	4000 K	36°
XLMTSX10C3B60BL	3000 K	60°
XLMTSX10C4B60BL	4000 K	60°

15W White Lamp Options

Part Number	CCT	B. angle
XLMTSX15C3B24WH	3000 K	24°
XLMTSX15C4B24WH	4000 K	24°
XLMTSX15C3B34WH	3000 K	34°
XLMTSX15C4B34WH	4000 K	34°
XLMTSX15C3B50WH	3000 K	50°
XLMTSX15C4B50WH	4000 K	50°

15W Black Lamp Options

Part Number	CCT	B. angle
XLMTSX15C3B24BL	3000 K	24°
XLMTSX15C4B24BL	4000 K	24°
XLMTSX15C3B34BL	3000 K	34°
XLMTSX15C4B34BL	4000 K	34°
XLMTSX15C3B50BL	3000 K	50°
XLMTSX15C4B50BL	4000 K	50°

Photometric Data

