


Model: OLDLR1C

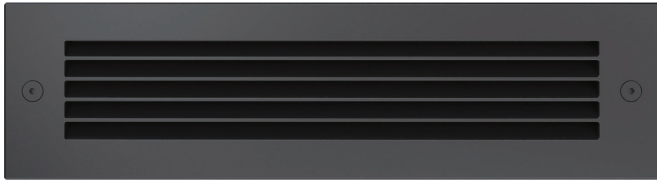

General Data

| | |
|----------------|---|
| Power | 10 Watts |
| LED type | 2835 SMD LED |
| Luminous flux | 300LM |
| CCT | 3000K or 4000K as standard. Different CCT upon request. |
| CRI | 80+ |
| Dimension | 260x70x72 mm |
| Cut out dia. | 256x66x71mm. |
| Lamp Life | 50000 hrs |
| SDCM | ≤5 |
| Oper. Temp. | -20~40°C |
| Certifications | CE, RoHS |

Construction Data

| | |
|-------------|------------------------|
| Color | White/ Black/ Grey |
| IP rating | IP66 Waterproof |
| IK rating | IK08 |
| Housing | ABS Housing |
| Material | Die-casting Aluminum |
| Diffuser | Frosted Tempered Glass |
| Cable Gland | IP67 |
| Gasket | silicone gasket |

Electrical Data


| | |
|---------------|---------------------|
| Input voltage | 110-240V /50Hz-60Hz |
| Driver | Philips |

Accessories

Mounting Sleeve Plastic recessed box

Clip /

Photometric Data

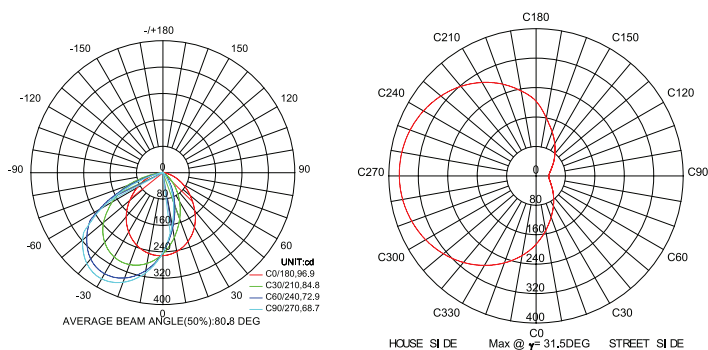

APPLICATIONS

With its modern design, This is the wall recessed solution for projects that require an attractive design and maximum visual comfort. it is designed and engineered to have a medium-light distribution.


PRODUCT DESCRIPTION

Recessed wall luminaire for outdoor installation, aluminum body, Low power 2835 SMD LED, IP65 rating.

FIXTURE CONSTRUCTION

anodized extruded aluminium body, Frost glass diffuser, driver build. Low power 2835 SMD LED, IP66

Dimension Drawing

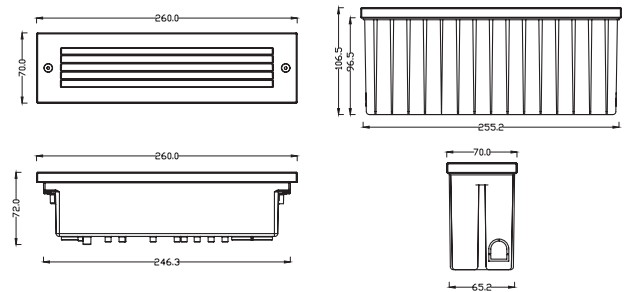

WHITE LAMP OPTIONS

| Part Number | CCT | Body Color |
|-------------|--------|------------|
| OLDLR1CC3WH | 3000 K | White |
| OLDLR1CC4WH | 4000 K | White |

BLACK LAMP OPTIONS

| Part Number | CCT | Body Color |
|-------------|--------|------------|
| OLDLR1CC3BL | 3000 K | Black |
| OLDLR1CC4BL | 4000 K | Black |

GREY LAMP OPTIONS

| Part Number | CCT | Body Color |
|-------------|--------|------------|
| OLDLR1CC3GR | 3000 K | Grey |
| OLDLR1CC3GR | 4000 K | Grey |