


Model: SL24V4.8IP65



General Data	
System Watts	4.8W
Voltage	24V
LED Distance	1.67 cm
Roll Length	5m
Max to connect	5 Rolls
Cutting Distance	10 cm
PCB Colour	White
Lumen lm	p/m 480lm
Beam angle	120°
LED Type	3528
LED Qty	p/m 60
Connection Type	Stripped wire
IP Rating	IP65

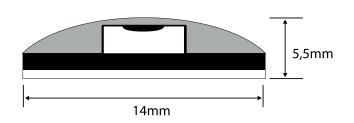

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.

PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and widith, comes in 5 meters roll, with 3M adhesive tape.IP65

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP65. with 3M adhesive tape.

Strip light options		
Color	Part Number	CCT
*****	SL24V4.8IP6527	2700K
	SL24V4.8IP653	3000K
*****	SL24V4.8IP654	4000K
*****	SL24V4.8IP656	6000K
Color	Part Number	CCT
*****	SL24V4.8IP65R	Red
··········	SL24V4.8IP65G	Green
*******	SL24V4.8IP65B	Blue

- Driver to be order separatelyCable distance should be taken into consideration.

Driver: Constant Voltage Output

Dimension Drawing

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75W	IP 67	1 - 14 Meter Max	5 years
MW- XLG-150-24	150W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 14 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 20 Meter Max	5 years