

Model: MX15 Modular



General Data

Power	15 W
LED type	Cree LED
Luminous flux	1125 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	82+
Beam angle	20°, 40°, 60°
Dimension	Ø100x45 mm
Cut out dia.	Ø50 mm
Weight (kgs)	0.12 Kgs
Lamp Life	50000 hrs
SDCM	≤5
Oper. Temp.	C -10° +45°
Certifications	CE, RoHS
Trim Color	White
Dimming	1-10V/DALI

Construction Data

IP rating	IP44
Housing	Solid aluminum housing CNC machined body
Protection finishing	passivated (anodizing) anti-corrosion finishing
Glass	Tempered glass diffuser
Loading capacity	/
Cable Gland	IP44
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	AC 100~240V
Cable	Cable gland

Accessories

Mounted Accessory	/
Clip	/

APPLICATIONS

High output LED 5 W LEDlamp with driver, can be used with wide range of trims to suite different applications and lighting solutions.


PRODUCT DESCRIPTION

Modular high out put 5 W LED lamp attached to aluminum heat sink and remote driver, suitable to use with our Modular down light range, comes with 3000 K, 4000 K, and 5000 K color tempretures, and 20°, 40°, 60° beam angleswith excellent color rendering 82 Ra. optional dimming1-10 V or Dali on request

FIXTURE CONSTRUCTION

Aluminum reflector, and die cast aluminum heat sink and electronic driver.

Dimension Drawing




Lamp Options

Part Number	CCT	Beam angle
MX15320	3000 K	20°
MX15420	4000 K	20°
MX15340	3000 K	40°
MX15440	4000 K	40°
MX15360	3000 K	60°
MX15460	4000 K	60°

Photometric Data

Light Distribution Curve [Unit: cd]

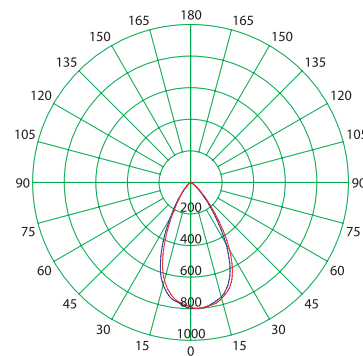

Lux distance Curve

