

**Model: FOS15SL1 FOS Focus**



**General Data**

|                |   |
|----------------|---|
| Power          | 15 W  |
| LED type       | COB   |
| Luminous flux  | 1350 lm   |
| CCT            | 3000K or 4000K as standard. Different CCT upon request. |
| CRI            | 80+   |
| Beam angle     | 15°/24°/36°/60°   |
| Color          | White/Grey/black  |
| Lamp Life      | 50000 hrs   |
| SDCM           | ≤5  |
| Oper. Temp.    | C -25° +40°   |
| Certifications | CE, RoHS  |
| Dimming        | 1-10V/DALI  |


**Construction Data**

|                      |   |
|----------------------|---|
| IP rating            | 20 Indoor                                       |
| Housing              | Solid aluminum housing CNC machined body        |
| Protection finishing | passivated (anodizing) anti-corrosion finishing |
| Glass                | Tempered glass diffuser                         |

**Electrical Data**

|               |              |
|---------------|--------------|
| Input voltage | AC 100-240 V |
| Cable         | /            |

**Dimension Drawing**

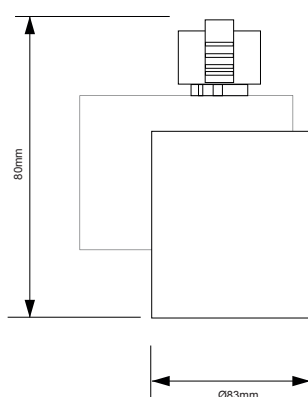

**APPLICATIONS**

Ideal for application where comfort and nice atmosphere is required. Its widely applied to retail lighting and other high-end commercial areas.

**PRODUCT DESCRIPTION**

15W Single circuit spot light. Easy installation and removal from track. Optimal thermal dissipation. adjustable up to 350° and up to 90° vertically. CCT, 3000K, 4000K, and beam angles, 15°/24°/36°/60°

**FIXTURE CONSTRUCTION**

Made of die cast aluminum body and heat sink and aluminum reflector. The adaptor locks the spotlight positively to the track, LED light source, PC gear box and electronic non dimmable driver. comes in white, black and silver

**White Lamp Options**

| Part Number   | CCT    | Beam angle |
|---------------|--------|------------|
| FOS15SL1WH312 | 3000 K | 15°        |
| FOS15SL1WH412 | 4000 K | 15°        |
| FOS15SL1WH324 | 3000 K | 24°        |
| FOS15SL1WH424 | 4000 K | 24°        |
| FOS15SL1WH336 | 3000 K | 36°        |
| FOS15SL1WH436 | 4000 K | 36°        |
| FOS15SL1WH360 | 3000 K | 60°        |
| FOS15SL1WH460 | 4000 K | 60°        |

**Black Lamp Options**

| Part Number   | CCT    | Beam angle |
|---------------|--------|------------|
| FOS15SL1BL312 | 3000 K | 15°        |
| FOS15SL1BL412 | 4000 K | 15°        |
| FOS15SL1BL324 | 3000 K | 24°        |
| FOS15SL1BL424 | 4000 K | 24°        |
| FOS15SL1BL336 | 3000 K | 36°        |
| FOS15SL1BL436 | 4000 K | 36°        |
| FOS15SL1BL360 | 3000 K | 60°        |
| FOS15SL1BL460 | 4000 K | 60°        |

**Grey Lamp Options**

| Part Number   | CCT    | Beam angle |
|---------------|--------|------------|
| FOS15SL1GR312 | 3000 K | 15°        |
| FOS15SL1GR412 | 4000 K | 15°        |
| FOS15SL1GR324 | 3000 K | 24°        |
| FOS15SL1GR424 | 4000 K | 24°        |
| FOS15SL1GR336 | 3000 K | 36°        |
| FOS15SL1GR436 | 4000 K | 36°        |
| FOS15SL1GR360 | 3000 K | 60°        |
| FOS15SL1GR460 | 4000 K | 60°        |

**Photometric Data**

Light Distribution Curve [Unit: cd]

