

## Model: MY10 Modular



### General Data

Power	10 W
LED type	CREE LED
Luminous flux	900lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	12° / 24° / 36°
Dimension	Ø50X75mm
Cut out dia.	-
Weight (kgs)	0.90 Kgs
Lamp Life	50000 hrs
SDCM	≤5
Oper. Temp.	C -10° +45°
Certifications	CE, RoHS
Trim Color	Black
Dimming	1-10V/DALI

### Construction Data

IP rating	20 Indoor
Housing	Solid aluminum housing CNC machined body
Protection finishing	passivated (anodizing) anti-corrosion finishing
Glass	Tempered glass diffuser
Loading capacity	/
Cable Gland	IP20
Gasket	Silicone rubber gasket

### Electrical Data

Input voltage	AC 220V 50/60hz
Cable	Cable gland

### Accessories

Mounted Accessory	/
Clip	/

### APPLICATIONS

High output LED 10W LEDlamp with driver, can be used with wide range of trims to suite different applications and lighting solutions.


### PRODUCT DESCRIPTION

Modular high out put 10W LED lamp attached to aluminum heat sink and remote driver, suitable to use with our Modular down light range, comes with 300 K, 4000K color tempretures, and 40° beam angleswith excellent color rendering 80 Ra. optional dimming1-10 V or Dali on request

### FIXTURE CONSTRUCTION

Aluminum reflector, and die cast aluminum heat sink and electronic driver.

### Dimension Drawing

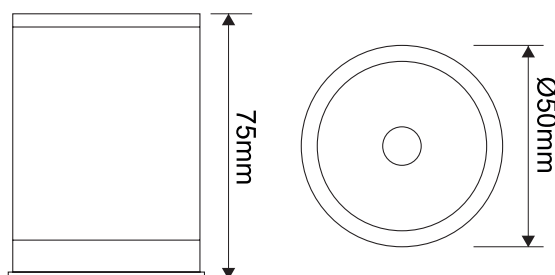

### Lamp Options

Part Number	CCT	Beam angle
MY10312	3000 K	12°
MY10412	4000 K	12°
MY10324	3000 K	24°
MY10424	4000 K	24°
MY10336	3000 K	36°
MY10436	4000 K	36°

### Photometric Data

