

Model: OLDLR3121



General Data

Code	OLDLR3121	OLDLRS3121
Power	10 Watts	5 Watts
LED type	2835 SMD LED	
Luminous flux	500LM	250LM
CCT	3000K or 4000K as standard. Different CCT upon request.	
CRI	80+	
Dimension	206x104x43.5 mm	
Cut out dia.	194x91x61mm.	
Lamp Life	50000 hrs	
SDCM	≤5	
Oper. Temp.	-20~40°C	
Certifications	CE, RoHS	

Construction Data

Color	White/ Black/ Grey
IP rating	IP65 Waterproof
IK rating	IK08
Housing	ABS Housing
Material	Die-casting Aluminum
Diffuser	anti-uv tempered glass
Cable Gland	IP67
Gasket	silicone gasket


Electrical Data

Input voltage	110-240V /50Hz-60Hz
Driver	Philips

Accessories

Mounting Sleeve	Plastic recessed box
Clip	/

Photometric Data

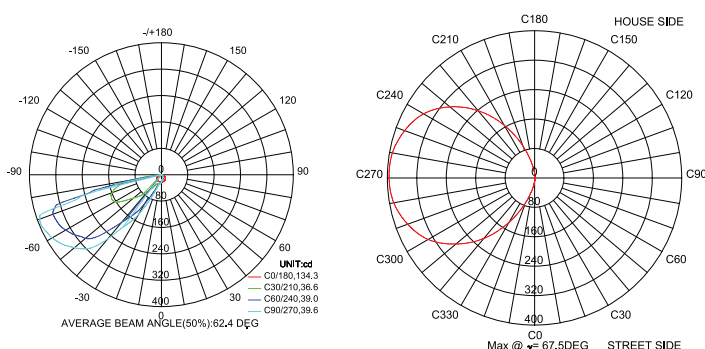

APPLICATIONS

With its modern design, This is the wall recessed solution for projects that require an attractive design and maximum visual comfort. it is designed and engineered to have a medium-light distribution.


PRODUCT DESCRIPTION

Recessed wall luminaire for outdoor installation, aluminum body, Low power 2835 SMD LED LED, IP65 rating.

FIXTURE CONSTRUCTION

anodized extruded aluminium body, Frost glass diffuser, driver build. Low power 2835 SMD LED, IP66

Dimension Drawing

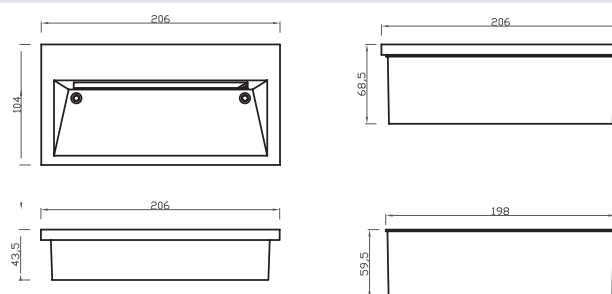

OLDLR3121 10W WHITE LAMP OPTIONS

Part Number	CCT	Body Color
OLDLR3121C3WH	3000 K	White
OLDLR3121C4WH	4000 K	White

OLDLR3121 10W BLACK LAMP OPTIONS

Part Number	CCT	Body Color
OLDLR3121C3BL	3000 K	Black
OLDLR3121C4BL	4000 K	Black

OLDLR3121 10W GREY LAMP OPTIONS

Part Number	CCT	Body Color
OLDLR3121C3GR	3000 K	Grey
OLDLR3121C3GR	4000 K	Grey

OLDLRS3121 5W WHITE LAMP OPTIONS

Part Number	CCT	Body Color
OLDLRS3121C3WH	3000 K	White
OLDLRS3121C4WH	4000 K	White

OLDLRS3121 5W BLACK LAMP OPTIONS

Part Number	CCT	Body Color
OLDLRS3121C3BL	3000 K	Black
OLDLRS3121C4BL	4000 K	Black

OLDLRS3121 5W GREY LAMP OPTIONS

Part Number	CCT	Body Color
OLDLRS3121C3GR	3000 K	Grey
OLDLRS3121C3GR	4000 K	Grey