

**Model: OLWWYS112**  
**Small Structure Series**




**Construction Data**

<b>LED type</b>	OSRAM
<b>IP rating</b>	IP66 Waterproof
<b>IK rating</b>	IK08
<b>Housing</b>	Aluminum housing
<b>Gasket</b>	Silicone rubber
<b>Glass</b>	Tempered Glass.
<b>Operatin temperature</b>	-30°C-50°C
<b>Cable Gland</b>	H05RN-F
<b>Gasket</b>	PMQ silicone seal

**Electrical Data**

<b>Input voltage</b>	DC24V
<b>Control</b>	ON/OFF / DMX / RDM / DALI / 0-10V
<b>Cable</b>	IP68 Male female connectors

**Photometric Data RGBW 48W 15°**

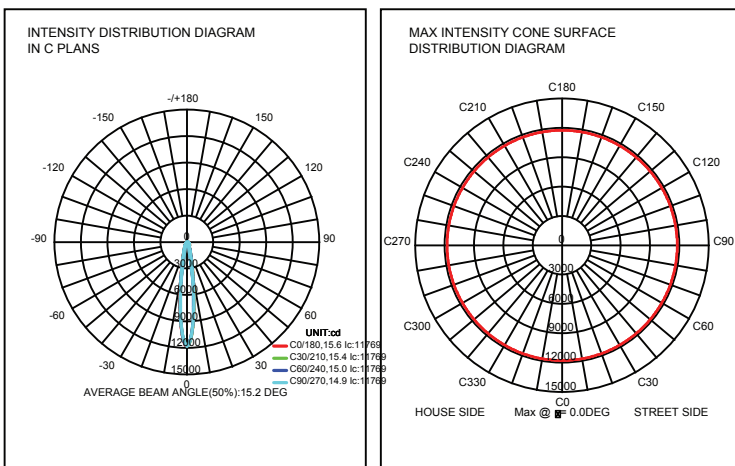

**APPLICATIONS**


These lights are used in exterior applications, such as Facade lighting, architectural features, lighting columns, walls, as well as landscape features, gardens, parks, etc.

**PRODUCT DESCRIPTION**


Surface-mounted linear slim wall washer luminaire for outdoor installation,, length 1000mm/ 500mm and 300mm, Aluminum alloy body housing. Low power OSRAM LED, with DMX / RDM / DALI / 0-10V Control Options, IP66 rated

**FIXTURE CONSTRUCTION**


Extrude aluminum Powder coated body with tempered glass and Angle Bracket Adjustable with Stainless steel Screws , silicone gasket seal and H 05RN-F cables with waterproof connector male + female IP66 rated.

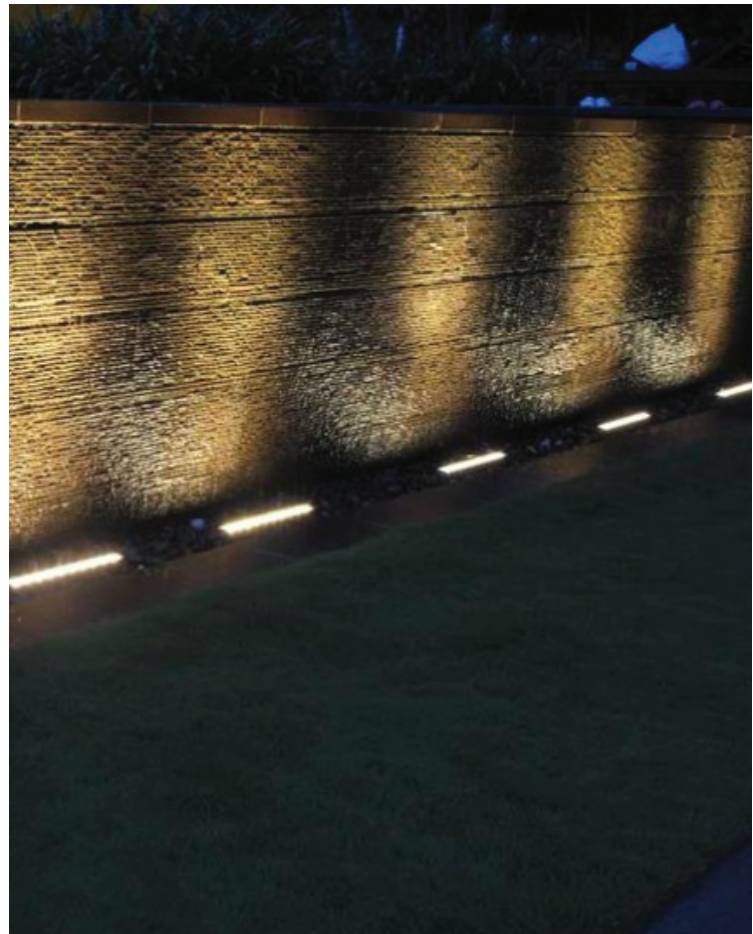

**Dimension**

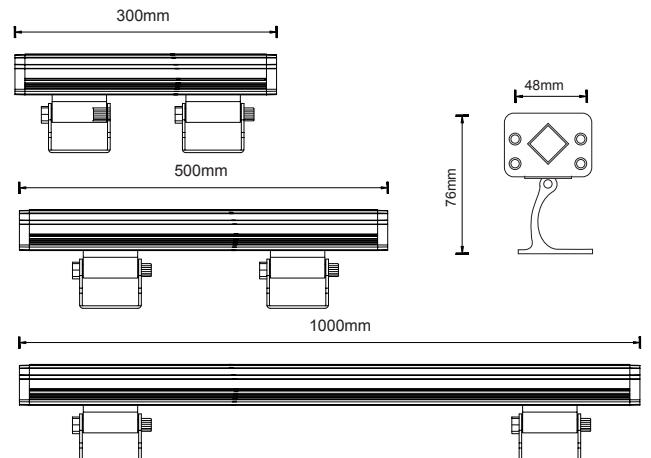

Model: OLWWYS112 Large  
Small Structure Series 1000

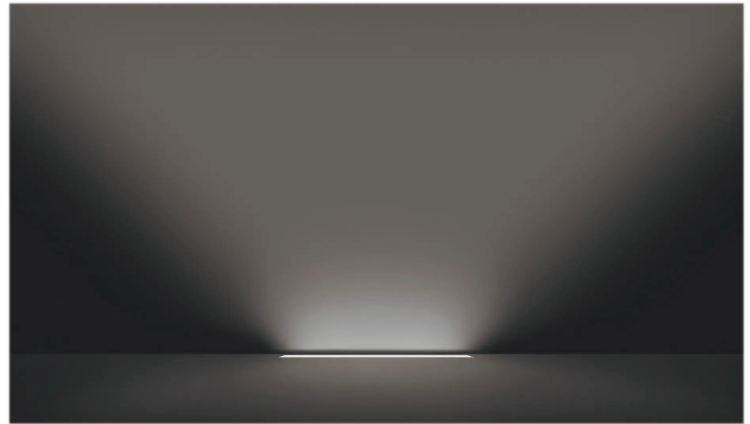

**LAMP DATA**


Type	Larg
Power	48W
LED type	OSRAM LED
3000K/4000K Luminous flux	3800lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	1000x48x76mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS

**Lamp Options Large 1000mm OLWWYS112L**


Part Number	CCT	Beam
OLWWYS112LC3B8	3000 K	8°
OLWWYS112LC4B8	4000 K	8°
OLWWYS112LC3B15	3000 K	15°
OLWWYS112LC4B15	4000 K	15°
OLWWYS112LCRGG15	RGB	15°
OLWWYS112LCRGGWB15	RGBW	15°
OLWWYS112LC3B30	3000 K	30°
OLWWYS112LC4B30	4000 K	30°
OLWWYS112LCRGG30	RGB	30°
OLWWYS112LCRGGWB30	RGBW	30°
OLWWYS112LC3B45	3000 K	45°
OLWWYS112LC4B45	4000 K	45°
OLWWYS112LCRGG45	RGB	45°
OLWWYS112LCRGGWB45	RGBW	45°
OLWWYS112LC3B20X60	3000 K	20X60°
OLWWYS112LC4B20X60	4000 K	20X60°
OLWWYS112LCRGG20X60	RGB	20X60°
OLWWYS112LCRGGWB20X60	RGBW	20X60°



**LAMP Dimension**

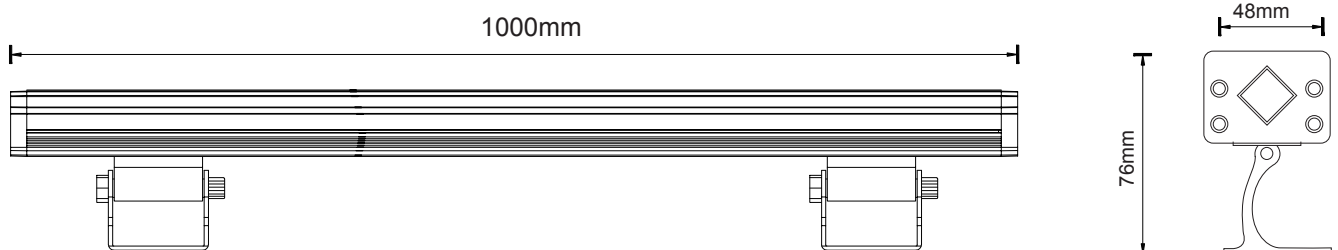

### Model: OLWWYS112 Medium Small Structure Series 500

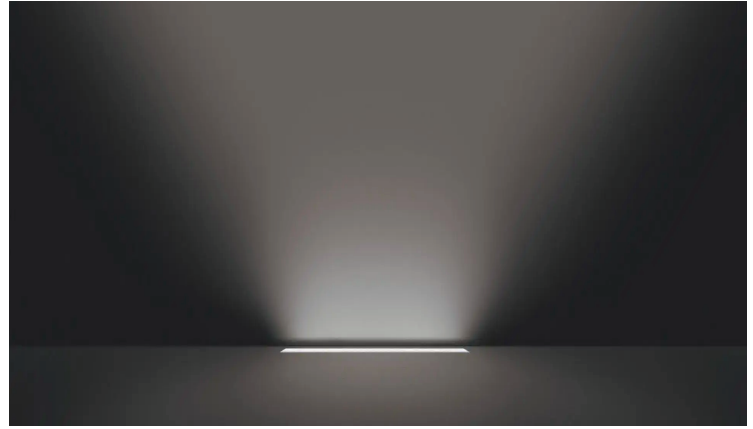

#### LAMP DATA


Type	Medium
Power	24W
LED type	OSRAM LED
3000K/4000K Luminous flux	1900lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	500x48x76mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS




#### Lamp Options Medium 500mm OLWWYS112M

Part Number	CCT	Beam
OLWWYS112MC3B8	3000 K	8°
OLWWYS112MC4B8	4000 K	8°
OLWWYS112MC3B15	3000 K	15°
OLWWYS112MC4B15	4000 K	15°
OLWWYS112MCRGBB15	RGB	15°
OLWWYS112MCRGBWB15	RGBW	15°
OLWWYS112MC3B30	3000 K	30°
OLWWYS112MC4B30	4000 K	30°
OLWWYS112MCRGBB30	RGB	30°
OLWWYS112MCRGBWB30	RGBW	30°
OLWWYS112MC3B45	3000 K	45°
OLWWYS112MC4B45	4000 K	45°
OLWWYS112MCRGBB45	RGB	45°
OLWWYS112MCRGBWB45	RGBW	45°
OLWWYS112MC3B20X60	3000 K	20X60°
OLWWYS112MC4B20X60	4000 K	20X60°
OLWWYS112MCRGBB20X60	RGB	20X60°
OLWWYS112MCRGBWB20X60	RGBW	20X60°

#### LAMP Dimension

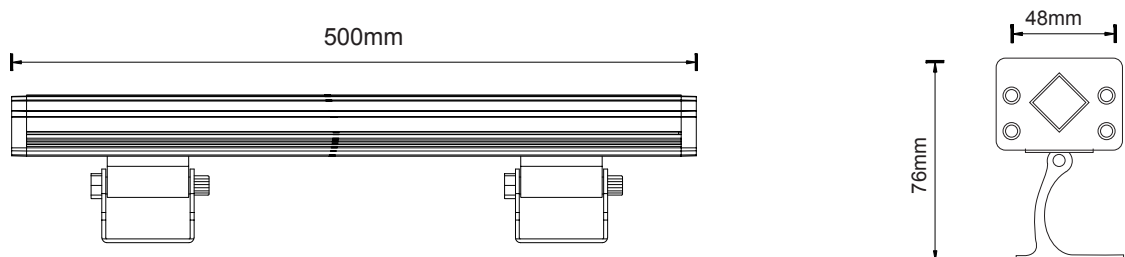

### Model: OLWWYS112 Small Small Structure Series 300

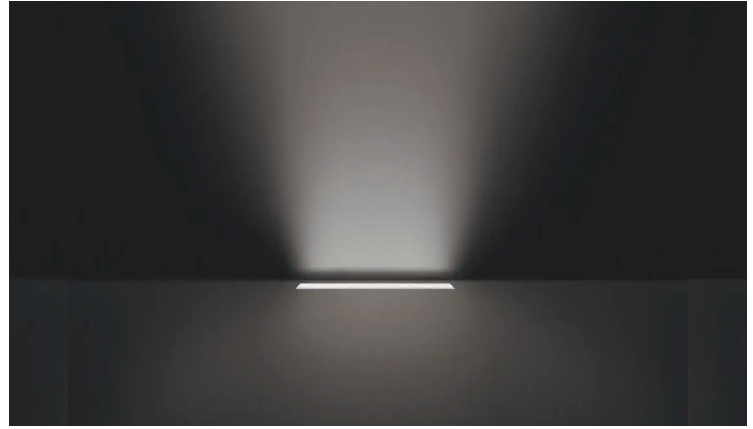

#### LAMP DATA

Type	Small
Power	12W
LED type	OSRAM LED
3000K/4000K Luminous flux	950lm
RGB/RGBW Lumin	35lm/W
CCT	3000K/4000K/RGB/RGBW
CRI	80+
3000K/4000K Beam angle	8°/15°/30°/45°/20°*60°
RGB/RGBW Beam angle	15°/30°/45°/20°*60°
Dimension	300x48x76mm
Lamp Life	50000 hrs
SDCM	≤5
RAL Color	80+
Oper. Temp.	-30~50°C
Certifications	CE, RoHS



#### Lamp Options Small 300mm OLWWYS112S

Part Number	CCT	Beam
OLWWYS112SC3B8	3000 K	8°
OLWWYS112SC4B8	4000 K	8°
OLWWYS112SC3B15	3000 K	15°
OLWWYS112SC4B15	4000 K	15°
OLWWYS112SCRGBB15	RGB	15°
OLWWYS112SCRGBWB15	RGBW	15°
OLWWYS112SC3B30	3000 K	30°
OLWWYS112SC4B30	4000 K	30°
OLWWYS112SCRGBB30	RGB	30°
OLWWYS112SCRGBWB30	RGBW	30°
OLWWYS112SC3B45	3000 K	45°
OLWWYS112SC4B45	4000 K	45°
OLWWYS112SCRGBB45	RGB	45°
OLWWYS112SCRGBWB45	RGBW	45°
OLWWYS112SC3B20X60	3000 K	20X60°
OLWWYS112SC4B20X60	4000 K	20X60°
OLWWYS112SCRGBB20X60	RGB	20X60°
OLWWYS112SCRGBWB20X60	RGBW	20X60°

#### LAMP Dimension

