

Model: OLP036102



APPLICATIONS

These bollard lights are widely used in exterior applications, such as general lighting, as well as landscape features for residential areas, hotels, gardens, parks, footpaths, etc.


PRODUCT DESCRIPTION

LED bollard luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power SMD LED, IP65 rating.

FIXTURE CONSTRUCTION

Aluminum body housing, Anti-corrosion Graphene powder coating finishing, Tempered glass diffuser for high loading capacity, Silicone rubber gasket. IP65 rating

Dimension Drawing

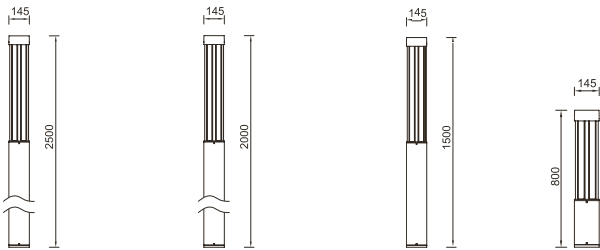

OLP03610225

OLP036102200

OLP036102150

OLP03610280

General Data

Rated Power	12W	18W	24W	30W
Dimension	Ø145x80mm	Ø145x150mm	Ø145x200mm	Ø145x250mm
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Luminous Flux	800lm	1200lm	1600lm	2700lm
Color Temperature	3000K or 4000K as standard. Different CCT upon request.			
Beam angle	360°	360°	360°	360°
CRI	>80	>80	>80	>80
Oper. Temp.	-30°-45°	-30°-45°	-30°-45°	-30°-45°
Lamp Life	50000 hrs	50000 hrs	50000 hrs	50000 hrs
SDCM	≤5	≤5	≤5	≤5
Ambient Temp.	-40°-45°	-40°-45°	-40°-45°	-40°-45°
RAL Color	80+	80+	80+	80+
Certifications	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS


Construction Data

IP rating	IP65 Waterproof
Housing	Aluminum body
Protection finishing	Anti-corrosion Graphene powder coating
Glass	Tempered glass diffuser
Cable Gland	PG7 IP65

Electrical Data


Input voltage	AC110-240V
---------------	------------

Photometric Data

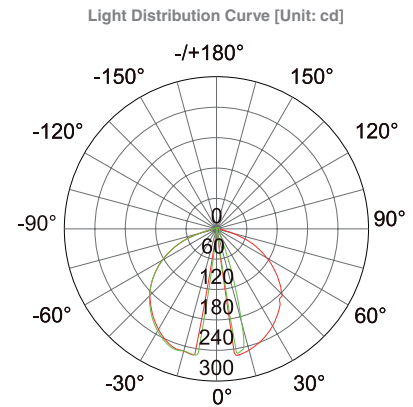


Lamp Options 80cm - 12W

Part Number	CCT	B. angle
OLP03610280C3	3000 K	360°
OLP03610280C4	4000 K	360°




Lamp Options 150cm - 18W

Part Number	CCT	B. angle
OLP036102150C3	3000 K	360°
OLP036102150C4	4000 K	360°



Lamp Options 200cm - 24W

Part Number	CCT	B. angle
OLP036102200C3	3000 K	360°
OLP036102200C4	4000 K	360°



Lamp Options 36Inch - 20W

Part Number	CCT	B. angle
OLP036102250C3	3000 K	360°
OLP036102250C4	4000 K	360°

