














### Model: NF1615ST

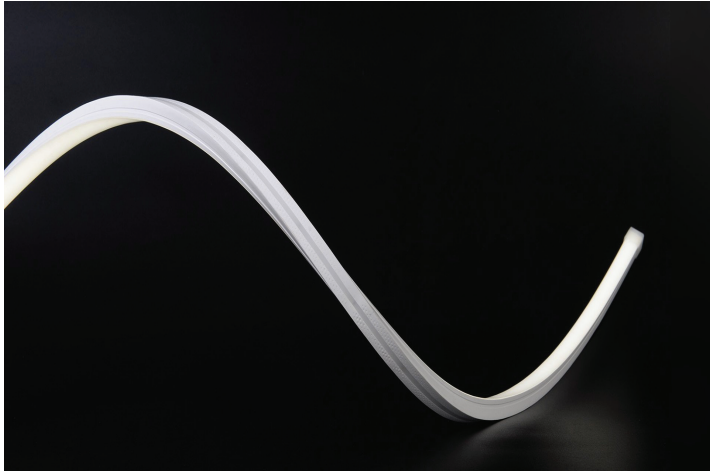

#### General Data

<b>Model Number</b>	NF1615ST5W	NF1615ST12W
<b>Power</b>	5w/m	12w/m
<b>Dimension</b>	15x16mm	
<b>Roll Length</b>	5m	
<b>Luminous</b>	77lm/w	73m/w
<b>CCT</b>	3000K/4000K/6000K/Red/Green/Blue/RGB/RGBW	
<b>CRI</b>	≥90	
<b>Color</b>	White	
<b>SDCM</b>	≤3	
<b>Oper. Temp.</b>	-25°C~60°C	
<b>IP Rating</b>	IP67	
<b>Input voltage (V)</b>	24V	
<b>Certifications</b>	CE, RoHS	

#### Accessory

			
Silicone Front Cable Entry <b>NF1615STSF</b>	Silicone Side Cable Entry <b>NF1615STSSE</b>	Silicone Bottom Cable Entry <b>NF1615STSSE</b>	IP67 Silicone connector 2 cores <b>NF1615STSC2</b> 4 cores <b>NF1615STSC4</b>
			
IP67 Silicone end cap <b>NF1615STCEC</b>	Aluminium Profile <b>NF1615STAP</b>	Stainless Steel Mounting Clip <b>NF1615STSSMC</b>	Aluminium Mounting clip <b>NF1615STAMC</b>
			
Curved aluminum profile <b>NF1615STCAP</b>	1x30cm silicone cable male+1x 30cm female 2 cores <b>NFECMF2</b>	1x30cm silicone cable male+1x 30cm female 4 cores <b>NFECMF4</b>	Scissors

#### APPLICATIONS

deal for high lighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.


#### PRODUCT DESCRIPTION

Combine with top bend and side bend, to meet the request of the different space bend.

#### FIXTURE CONSTRUCTION

High light transmittance, environmental protection grade silicone material, integrated extrusion molding process. With Unique optical light distribution structure design, uniform lighting surface and no shadow. IP67 protection level, salt solution resistance, acids & alkalis,corrosive gases, fire and UV Excellent toughness, simple and stylish appearance, delicate and unique

#### Top & Side Bend

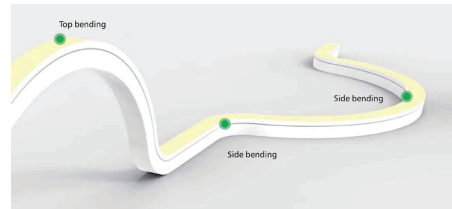

#### 3D 5W Neon Flex Options

Part Number	CCT
<b>NF1615ST5WC3</b>	3000 K
<b>NF1615ST5WC4</b>	4000 K
<b>NF1615ST5WC6</b>	6000 K
<b>NF1615ST5WCR</b>	Red
<b>NF1615ST5WCG</b>	Green
<b>NF1615ST5WCB</b>	Blue

#### 3D 12W Neon Flex Options

Part Number	CCT
<b>NF1615ST12WC3</b>	3000 K
<b>NF1615ST12WC4</b>	4000 K
<b>NF1615ST12WC6</b>	6000 K
<b>NF1615ST12WCR</b>	Red
<b>NF1615ST12WCG</b>	Green
<b>NF1615ST12WCB</b>	Blue


#### 5W Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75W	IP 67	1 - 14 Meter Max	5 years
MW- XLG-150-24	150W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 14 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 20 Meter Max	5 years

#### 12W Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75 W	IP 67	1 - 7 Meter Max	5 years
MW- XLG-240-24	240 W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 7 Meter Max	5 years
MW- ELG-240-24	240 W	IP 67	1 - 20 Meter Max	5 years

#### Photometric Data

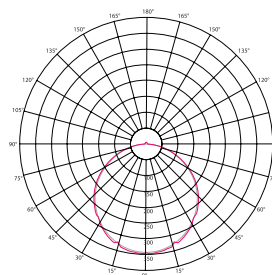

#### Dimension

