

Model: OLB013028



General Data

Power	6W
LED type	3Wx2 COB LED
Luminous flux	45 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	60° x2 , 6° x2
Dimension	71x65x150mm
Cut out dia.	/
Weight (kgs)	1.3 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

Construction Data

IP rating	IP65 Waterproof
Housing	Cast aluminum body
Protection finishing	Graphene powder coating finish
Glass	Tempered glass
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	AC110~240V
Cable	Cable gland for waterproof IP65

APPLICATIONS

These lights are widely used in exterior applications, such as Facade lighting, columns, walls, architectural features, landscape features for hotels, as well as residential applications, etc.

PRODUCT DESCRIPTION

Surface-mounted wall luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power COB LED, IP65 rating.


FIXTURE CONSTRUCTION

Cast aluminum body, with passivated (anodizing) anticorrosion finishing, stainless steel screws, silicon seal gaskets and cable gland for waterproof IP65

Accessories

- Mounting Sleeve /
- Clip /

Dimension Drawing

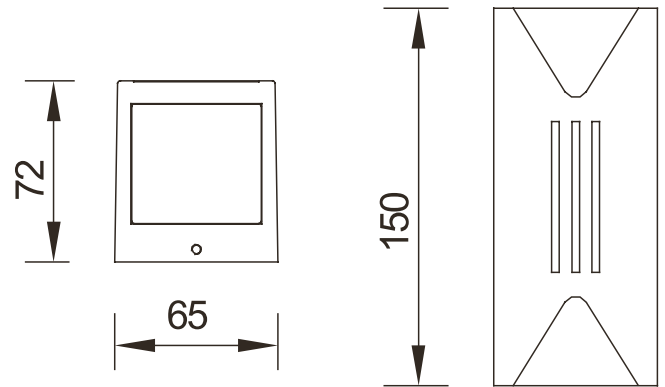


Lamp Options

Part Number	CCT	Beam angle
OLB013028C3B60	3000 K	60° x2
OLB013028C4B60	4000 K	60° x2
OLB013028C3B6	3000 K	6° x2
OLB013028C4B6	4000 K	6° x2

Photometric Data

Light Distribution Curve [Unit: cd]

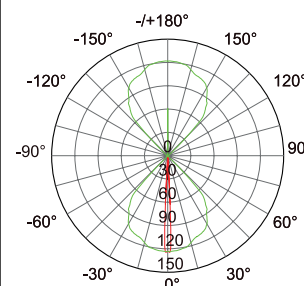

Illumination Drawing

