

Model: XLWL350AL
Weatherproof-Bulkhead



General Data

Lamp Type	CREE SMD2835
System Watts	15 W
Lumens	1350 lm
Lamp Life	50000 hrs
CRI	>80 Ra
Beam Angle	120°
IP Rating	IP 65
Weight (Kgs)	4 Kgs
Voltage	220-240V
CCT	3000/6500K
Oper. temp.	-20 to +40
Dimension	350x125x70

Construction Data

IP rating	IP 65 Outdoor
Housing	PC housing
Protection finishing	/
Glass	PC cover
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	220-240V
Cable	/

Accessories

Mounted Accessory	/
Clip	/

APPLICATIONS

Ideal for general lighting indoors or outdoors, commercial and residential applications.


PRODUCT DESCRIPTION

Surface mounted or suspended mounted LED Weatherproof Injection for PC housing and PC cover, offering IP65 protection against moisture and dust.

FIXTURE CONSTRUCTION

PC housing and PC cover locked by screws, vandal proof.

Dimension Drawing

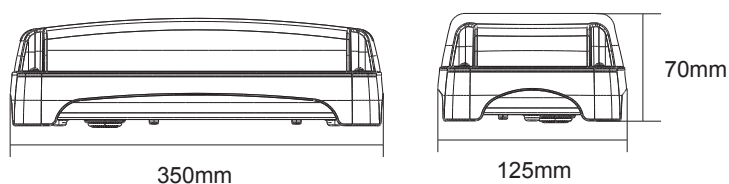


Lamp Options

Part Number	CCT
XLWL350AL3	3000 K
XLWL350AL65	6500 K

Light Distribution Curve [Unit: cd]

Photometric Data

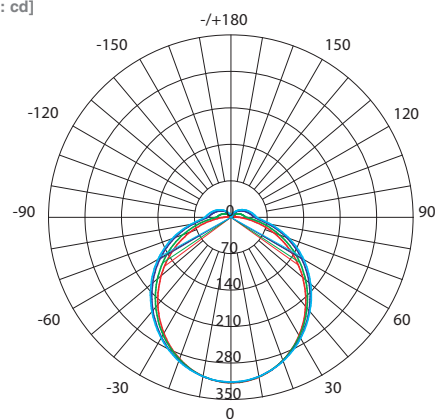

Beam angle

Height	Eavg, Emax	Beam diameter
1m	99.65, 317.61 x	276.64cm
2m	24.91, 79.411 x	553.29cm
3m	11.07, 35.291 x	829.93cm
4m	6.228, 19.851 x	1106.58cm
5m	3.986, 12.711 x	1383.22cm
6m	2.768, 8.8241 x	1659.87cm
7m	2.034, 6.4831 x	1936.51cm
8m	1.557, 4.9631 x	2213.16cm
9m	1.230, 3.9221 x	2489.80cm
10m	0.9965, 3.1761 x	2766.45cm

Angle: 108.27deg