
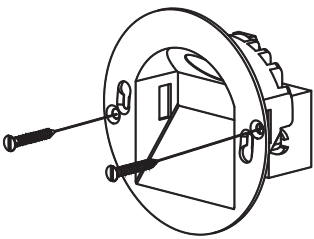


XL marlin Lighting


Exterior Wall Recessed Lighting (OLWL3019) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: OLWL3019
2. Rated Voltage: AC 240V
3. Rated Power: 3 W
4. IP Grade: IP65



Mounting sleeve




Embedded box

- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

1. PREPARE THE WALL


Dug a hole according to the dimension of Embedded box CutOut:Ø75mm



2. PLACE THE EMBEDDED BOX


3. CONNECT THE CABLE .

Live line for L terminal, Null line for N terminal, Ground line for E terminal.

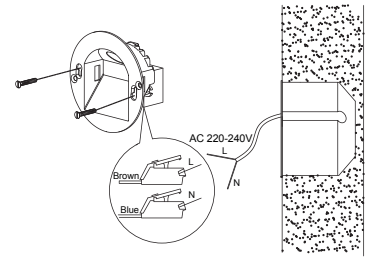


4. PUSH THE THE MOUNTING SLEEVE INTO THE EMBEDDED BOX .

5. PUSH THE FIXTURE INTO THE MOUNTING SLEEVE.



6. CONNECT THE POWER SUPPLY, light up the lamp.



The light source of this luminaire is not replaceable; when the source reaches its end of life the whole luminaire shall be replaced

Welcome you again to buy our products