


Model: SL24V7.2IP68



General Data	
System Watts	7.2W
Voltage	24V
LED Distance	3.33 cm
Roll Length	5m
Max to connect	3 Rolls
Cutting Distance	19.9 cm
PCB Colour	White
Lumen lm p/m	660lm
Beam angle	120°
LED Type	5050
LED Qty p/m	30
Connection Type	Stripped wire
IP Rating	IP68

Dimension Drawing

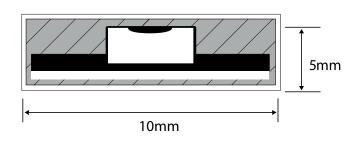

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.

PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and widith, comes in 5 meters roll, with 3M adhesive tape. IP68

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP68. with 3M adhesive tape.

Strip light options		
Color	Part Number	CCT
*****	SL24V7.2IP68RGB	Red Green Blue
	SL24V7.2IP68RGBW	Red Green Blue White
******	SL24V7.2IP68CW	Cool White Warm White

Driver to be order separately Cable distance should be taken into consideration.

Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
SRP-2108-24-100W	100 W	IP 20	1 - 13 Meter Max	5 years
SRP-2108-24-200W	200 W	IP 20	1 - 20 Meter Max	5 years