

**Model: OL3027**



**General Data**

|                |   |
|----------------|---|
| Power          | 12W   |
| LED type       | 6Wx2 COB LED  |
| Luminous flux  | 650 lm  |
| CCT            | 3000K or 4000K as standard. Different CCT upon request. |
| CRI            | 80+   |
| Beam angle     | 63°x2   |
| Dimension      | 104x105x200mm   |
| Cut out dia.   | /   |
| Weight (kgs)   | 0.8 kgs   |
| Lamp Life      | 50000 hrs   |
| SDCM           | ≤5  |
| Ambient Temp.  | -40°-45°  |
| RAL Color      | 80+   |
| Oper. Temp.    | -30°-45°  |
| Certifications | CE, RoHS  |

**Construction Data**

|                      |                                |
|----------------------|--------------------------------|
| IP rating            | IP65 Waterproof                |
| Housing              | Cast aluminum body             |
| Protection finishing | Graphene powder coating finish |
| Glass                | Tempered glass                 |
| Loading capacity     | /                              |
| Cable Gland          | IP65                           |
| Gasket               | Silicone rubber gasket         |

**Electrical Data**

|               |                                 |
|---------------|---------------------------------|
| Input voltage | AC110~240V                      |
| Cable         | Cable gland for waterproof IP65 |

**APPLICATIONS**

These lights are widely used in exterior applications, such as Facade lighting, columns, walls, architectural features, landscape features for hotels, as well as residential applications, etc.

**PRODUCT DESCRIPTION**

Surface-mounted wall luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power COB LED, IP65 rating.


**FIXTURE CONSTRUCTION**

Cast aluminum body, with passivated (anodizing) anticorrosion finishing, stainless steel screws, silicon seal gaskets and cable gland for waterproof IP65

**Accessories**

- Mounting Sleeve /
- Clip /

**Dimension Drawing**

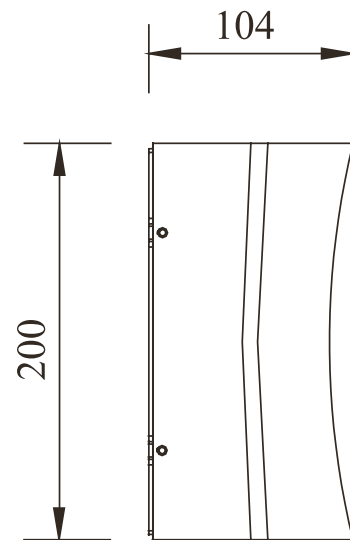


**Lamp Options**

| Part Number | CCT    | Beam angle |
|-------------|--------|------------|
| OL3027C3B63 | 3000 K | 63° x2     |
| OL3027C4B63 | 4000 K | 63° x2     |

**Photometric Data**

Light Distribution Curve [Unit: cd]



Illumination Drawing

