

The user: thank you for your purchase use this product, read this instruction manual before usage

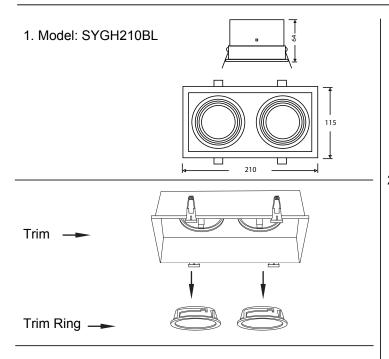

- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


Prepare The Ceiling
 Open a hole according to
 the dimension of the
 downlight trim that
 you choose to be used
 with the modular.



195x100 mm

2. Push The Trim Into The Opening










- 3. Rotate Counterclockwise To release The Ring
- 4. Push The Ring To The Lamp
- 5. Connect The Cable Of The Driver .

Live line for L terminal, Null line for N terminal, Ground line for E terminal.





6. Push The Fixture, Rotate Clockwise To Fix The Ring To Trim



7. Connect The Power Supply, Light Up The Lamp.

FOR SUITABLE TRIMS FOR THE MO/MX TYPE MODULAR SEE :
XL MARLIN LIGHTING CATALOGUE