

**Model: OLM023508B**



**General Data**

Power	5 W
LED type	LG LED
Luminous flux	151 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	110°
Dimension	54x297x76mm
Cut out dia.	35x275x9.5mm
Weight (kgs)	0.6 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

**Construction Data**

IP rating	IP65 Waterproof
Housing	Stainless steel recessed housing
Protection finishing	Graphene powder coating finish
Glass	Tempered glass
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

**Electrical Data**

Input voltage	AC100-255V
Cable	Cable gland for waterproof IP65

**APPLICATIONS**

With its modern design, This is the wall recessed solution for projects that require an attractive design and maximum visual comfort. It is designed and engineered to have a wide light distribution.

**PRODUCT DESCRIPTION**

Recessed wall luminaire for outdoor installation, aluminum body, Tempered glass, Low power LG LED, IP65 rating.


**FIXTURE CONSTRUCTION**

Cast aluminum, Graphene powder coating finish, Stainless steel recessed housing, Plastic recessed box, 304 Stainless steel cover, Silicon seal gaskets and cable gland for waterproof IP65

**Accessories**

- Mounting Sleeve /
- Clip /

**Dimension Drawing**

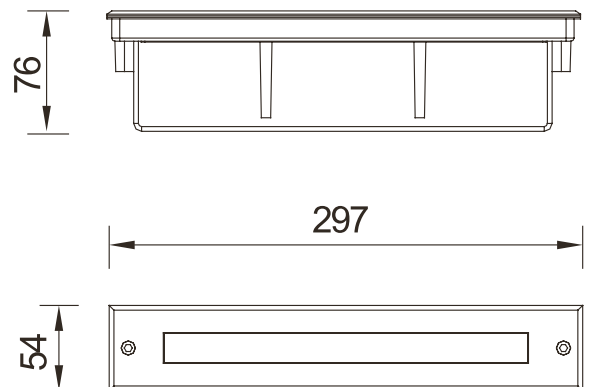


**Lamp Options**

Part Number	CCT	Beam angle
OLM023508BC3B110	3000 K	110°
OLM023508BC4B110	4000 K	110°

**Photometric Data**

Light Distribution Curve [Unit: cd]

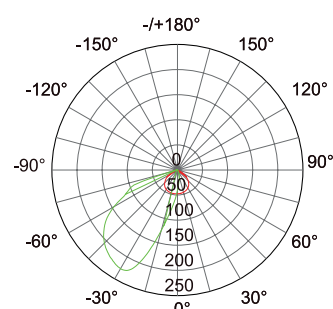

Illumination Drawing

