XL marlin Lighting

WEATHERPROOF- Light

Model: XL10H14F40W
Stainless Steel Base
Weatherproof-Linear

APPLICATIONS

Ideal for general lighting indoors or outdoors, Warehous,Refrigeration Starage, Parking lot, Factory, Tunnel, Bathroom, etc.
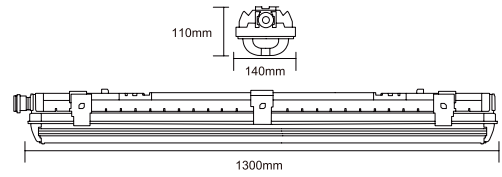
PRODUCT DESCRIPTION

Surface mounted or suspended mounted LED Weatherproof light, IP65, PC cover with and Stainless Steel Base light, with SS clips.

FIXTURE CONSTRUCTION

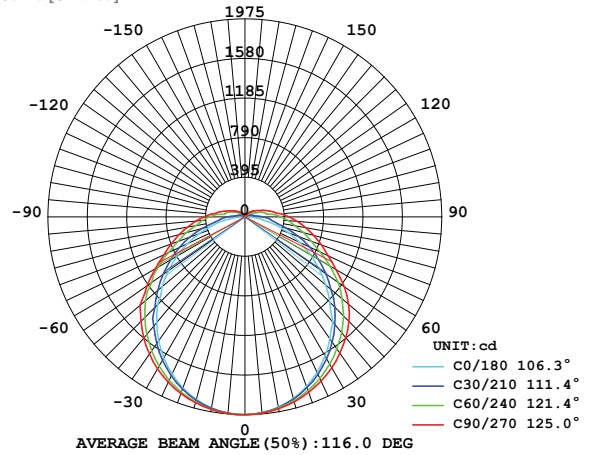SMD 2835 LED Chip, PC cover, 304 Stainless Steel Base with flicker free None-Isolated Driver, IP65

General Data

Lamp Type	SMD2835
System Watts	40W
Lumens	170Lm/w
Lamp Life	50000 hrs
CRI	>80 Ra
Beam Angle	120°
IP Rating	65
Weight (Kgs)	220-240V
CCT	3000/4000/6000K
SDCM	<3
Oper. temp.	-20°C~+40°C
Dimension	1300x140x110mm

Dimension Drawing

Lamp Options

Part Number	CCT
XL10H14F40WC3	3000 K
XL10H14F40WC4	4000 K
XL10H14F40WC6	6000 K

Photometric Data

Light Distribution Curve [Unit: cd]

UNIT:cd
C0/180 106.3°
C30/210 111.4°
C60/240 121.4°
C90/270 125.0°

AVERAGE BEAM ANGLE(50%):116.0 DEG

Beam angle

Height	AVR E	CENTER E	Diameter
1.50m	308.61lx	877.85lx	400.44cm
2.00m	173.59lx	493.79lx	533.92cm
4.00m	43.40lx	123.45lx	1067.83cm
4.50m	34.29lx	97.54lx	1201.31cm
6.00m	19.29lx	54.87lx	1601.75cm

Angle:106.3deg

Construction Data

IP rating	IP 65 Outdoor
Base	304 stainless steel base
Protection finishing	/
Cover	PC cover
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	220-240V 50/60HZ
Cable	/

Accessories

Mounted Accessory	Suspension Mount
Clip	Surface Mount Clip