


Model: SL24V19.2IP65



General Data

System Watts	19.2W
Voltage	24V
LED Distance	0.4 cm
Roll Length	5m
Max to connect	1 Rolls
Cutting Distance	2.4 cm
PCB Colour	White
Lumen lm p/m	1920lm
Beam angle	120°
LED Type	3528
LED Qty p/m	240
Connection Type	Stripped wire
IP Rating	IP65

Dimension Drawing

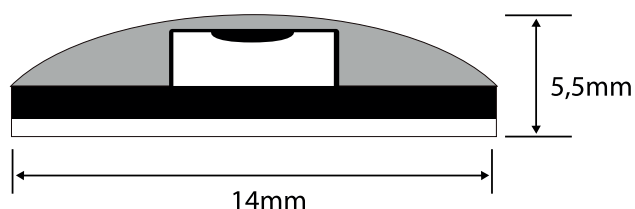

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.

PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and width, comes in 5 meters roll, with 3M adhesive tape. IP65

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP65. with 3M adhesive tape.

Strip light options

Color	Part Number	CCT
	SL24V19.2IP6527	2700K
	SL24V19.2IP653	3000K
	SL24V19.2IP654	4000K
	SL24V19.2IP656	6000K
Color	Part Number	CCT
	SL24V19.2IP65R	Red
	SL24V19.2IP65G	Green
	SL24V19.2IP65B	Blue

- Driver to be order separately
- Cable distance should be taken into consideration.

Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-150-24	150 W	IP 67	1 - 7 Meter Max	5 years
MW- XLG-240-24	240 W	IP 67	1 - 12 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 7 Meter Max	5 years
MW- ELG-300-24	300 W	IP 67	1 - 15 Meter Max	5 years