

# XL marlin Lighting

## MAGNETIC - Mini Magnetic Spot Light

### Model: XLMTS



### APPLICATIONS

Ideal for application where comfort and nice atmosphere is required. Its widely applied to retail lighting and other high-end commercial areas.

### PRODUCT DESCRIPTION

3W/5W/7W/12W or 15W Magnetic Mini Spot Light. Easy installation and removal from track. adjustable up to 350° and up to 90° vertically. CCT, 3000K, 4000K, and multiple beam angles.

### FIXTURE CONSTRUCTION

Made of die cast aluminum body and heat sink and aluminum reflector. The adaptor locks the spotlight positively to the track, LED light source. comes in white, black.

### General Data

Model	XLMTS3	XLMTS5	XLMTS7	XLMTS12	XLMTS15
System Watts	3W	5W	7W	12W	15W
Beam angle	12°/20°/30°	12°/20°/30°	15°/24°/36°	12°/20°/30°	12°/20°/30°
Lamp Lumens	60-70lm/w	60-70lm/w	75-80lm/w	75-80lm/w	75-80lm/w
Dimensions mm	ø35x75x68	ø35x75x68	ø50x118x125	ø50x118x140	ø50x118x125
Lamp Type	COB				
CRI	≥90				
Lamp Life	50000 hrs				
IP Rating	20				
Input voltage (V)	48V-50/60Hz				
Body Color	White/black				
CCT	3000K/4000K				

### XLMTS3 3W lamp options white

Part Number	CCT	B. angle
XLMTS3C3B12WH	3000 K	12°
XLMTS3C4B12WH	4000 K	12°
XLMTS3C3B20WH	3000 K	20°
XLMTS3C4B20WH	4000 K	20°
XLMTS3C3B30WH	3000 K	30°
XLMTS3C4B30WH	4000 K	30°

### XLMTS3 3W lamp options black

Part Number	CCT	B. angle
XLMTS3C3B12BL	3000 K	12°
XLMTS3C4B12BL	4000 K	12°
XLMTS3C3B20BL	3000 K	20°
XLMTS3C4B20BL	4000 K	20°
XLMTS3C3B30BL	3000 K	30°
XLMTS3C4B30BL	4000 K	30°

### XLMTS5 5W lamp options white

Part Number	CCT	B. angle
XLMTS5C3B12WH	3000 K	12°
XLMTS5C4B12WH	4000 K	12°
XLMTS5C3B20WH	3000 K	20°
XLMTS5C4B20WH	4000 K	20°
XLMTS5C3B30WH	3000 K	30°
XLMTS5C4B30WH	4000 K	30°

### XLMTS5 5W lamp options black

Part Number	CCT	B. angle
XLMTS5C3B12BL	3000 K	12°
XLMTS5C4B12BL	4000 K	12°
XLMTS5C3B20BL	3000 K	20°
XLMTS5C4B20BL	4000 K	20°
XLMTS5C3B30BL	3000 K	30°
XLMTS5C4B30BL	4000 K	30°

### XLMTS7 7W lamp options white

Part Number	CCT	B. angle
XLMTS7C3B15WH	3000 K	15°
XLMTS7C4B15WH	4000 K	15°
XLMTS7C3B24WH	3000 K	24°
XLMTS7C4B24WH	4000 K	24°
XLMTS7C3B36WH	3000 K	36°
XLMTS7C4B36WH	4000 K	36°

### XLMTS7 7W lamp options black

Part Number	CCT	B. angle
XLMTS7C3B15BL	3000 K	15°
XLMTS7C4B15BL	4000 K	15°
XLMTS7C3B24BL	3000 K	24°
XLMTS7C4B24BL	4000 K	24°
XLMTS7C3B36BL	3000 K	36°
XLMTS7C4B36BL	4000 K	36°


### XLMTS12 12W lamp options white

Part Number	CCT	B. angle
XLMTS12C3B12WH	3000 K	12°
XLMTS12C4B12WH	4000 K	12°
XLMTS12C3B20WH	3000 K	20°
XLMTS12C4B20WH	4000 K	20°
XLMTS12C3B30WH	3000 K	30°
XLMTS12C4B30WH	4000 K	30°


### XLMTS12 12W lamp options black

Part Number	CCT	B. angle
XLMTS12C3B12BL	3000 K	12°
XLMTS12C4B12BL	4000 K	12°
XLMTS12C3B20BL	3000 K	20°
XLMTS12C4B20BL	4000 K	20°
XLMTS12C3B30BL	3000 K	30°
XLMTS12C4B30BL	4000 K	30°

### Dimension



### Photometric Data

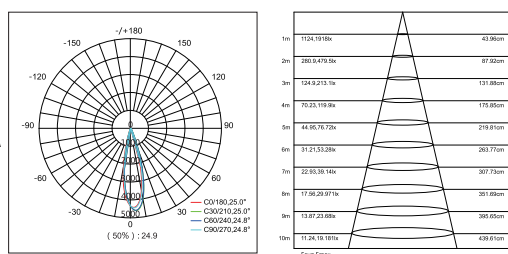

### XLMTS15 15W lamp options white

Part Number	CCT	B. angle
XLMTS15C3B12WH	3000 K	12°
XLMTS15C4B12WH	4000 K	12°
XLMTS15C3B20WH	3000 K	20°
XLMTS15C4B20WH	4000 K	20°
XLMTS15C3B30WH	3000 K	30°
XLMTS15C4B30WH	4000 K	30°

### XLMTS15 15W lamp options black

Part Number	CCT	B. angle
XLMTS15C3B12BL	3000 K	12°
XLMTS15C4B12BL	4000 K	12°
XLMTS15C3B20BL	3000 K	20°
XLMTS15C4B20BL	4000 K	20°
XLMTS15C3B30BL	3000 K	30°
XLMTS15C4B30BL	4000 K	30°