


Model: SL24V19.2IP68



General Data	
System Watts	19.2W
Voltage	24V
LED Distance	0.4 cm
Roll Length	5m
Max to connect	1 Rolls
Cutting Distance	2.4 cm
PCB Colour	White
Lumen lm p/m	1920lm
Beam angle	120°
LED Type	3528
LED Qty p/m	240
Connection Type	Stripped wire
IP Rating	IP68

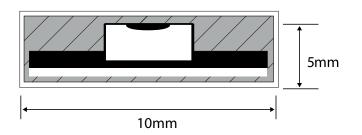

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.

PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and widith, comes in 5 meters roll, with 3M adhesive tape. IP68 $\,$

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP68. with 3M adhesive tape.

Strip light options		
Color	Part Number	CCT
*******	SL24V19.2IP6827	2700K
	SL24V19.2IP683	3000K
*****	SL24V19.2IP684	4000K
*****	SL24V19.2IP686	6000K
Color	Part Number	CCT
*********	SL24V19.2IP68R	Red
············	SL24V19.2IP68G	Green
*******	SL24V19.2IP68B	Blue

- Driver to be order separatelyCable distance should be taken into consideration.

Driver: Constant Voltage Output

Dimension Drawing

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-150-24	150 W	IP 67	1 - 7 Meter Max	5 years
MW- XLG-240-24	240 W	IP 67	1 - 12 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 7 Meter Max	5 years
MW- ELG-300-24	300 W	IP 67	1 - 15 Meter Max	5 years