

Model: OLSL11S



Lamp Options

Part Number	Power	CCT	Color
OLSL11S50C3G	50W	3000 K	Grey
OLSL11S50C3B	50W	3000 K	Black
OLSL11S50C3W	50W	3000 K	White
OLSL11S50C4G	50W	4000 K	Grey
OLSL11S50C4B	50W	4000 K	Black
OLSL11S50C4W	50W	4000 K	White

Part Number	Power	CCT	Color
OLSL11S70C3G	70W	3000 K	Grey
OLSL11S70C3B	70W	3000 K	Black
OLSL11S70C3W	70W	3000 K	White
OLSL11S70C4G	70W	4000 K	Grey
OLSL11S70C4B	70W	4000 K	Black
OLSL11S70C4W	70W	4000 K	White

Part Number	Power	CCT	Color
OLSL11S90C3G	90W	3000 K	Grey
OLSL11S90C3B	90W	3000 K	Black
OLSL11S90C3W	90W	3000 K	White
OLSL11S90C4G	90W	4000 K	Grey
OLSL11S90C4B	90W	4000 K	Black
OLSL11S90C4W	90W	4000 K	White

General Data

Power	50W / 70W / 90W
LED type	SMD LED
Luminous flux	7008lm / 9464lm / 11661lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	70+
Dimension	450x299x86mm
Cut out dia.	/
Lum efficacy	110-140lm/W
Lamp Life	100,000 hrs
SDCM	≤5
Oper. temp.	-30 to 45°
Certifications	CE, RoHS

Construction Data

IP rating	65 waterproof
IK rating	IK08
Housing	ADC12 die-cast aluminum
Cover	Toughened Glass
Color	Grey/ Black/ White

APPLICATIONS

These lights are widely used in exterior applications, such as Urban or Street lighting, highway, main roads, parking lot, etc.

PRODUCT DESCRIPTION

Outstanding heat dissipation and compacting system. Equipped with high-quality electrical components, long lifetime is assured, and efficient system could reduce energy consumption and create a more attractive urban living environment and visual comforts for public and residential areas.


FIXTURE CONSTRUCTION

- High pressure die-casting aluminum housing
- Excellent thermal management
- High efficient SMD leds
- Patented optics for increased application efficiency
- Multiple beam angles options for wide applications


Electrical Data

Input voltage	90-305VAC/50-60Hz
Cable	Cable gland for waterproof IP65
Classification	Class II

Dimension Drawing

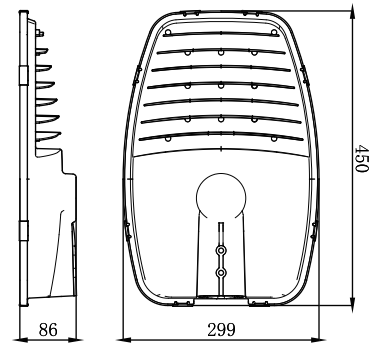

Photometric Data

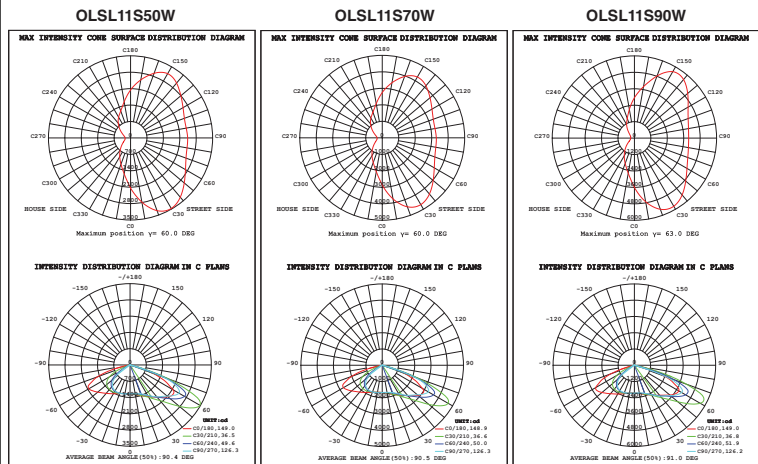

Accessories



48 Adapt to 60mm Angle Title bracket

60 Adapt to 60mm Angle Title bracket

60 Adapt to 76mm Pipe adaptor

Photocell

NEMA Socket