


Model: XLSCLS



General Data

Model Number	XLSCLS6W	XLSCLS10W
Power	6W	10W
Dimension	82x82x51mm	
Cut out dia.	75x75mm	
LED type	Citizen LED	
Luminous	75lm/W	
CCT	3000K or 4000K different CCT upon request	
CRI	≥90	
Beam angle	24°/ 38°/ 60°	
Lamp Life	50000 hrs	
SDCM	≤3	
Product Finishing	Black/White	
Oper. Temp.	-20°C~40°C	
IP Rating	IP65	
Input voltage (V)	AC220-240V 50-60Hz	
Dimming Opt.	DALI / 1-10V	
Housing Material	Aluminum Die-Casting	
Certifications	CE, RoHS	

Photometric Data

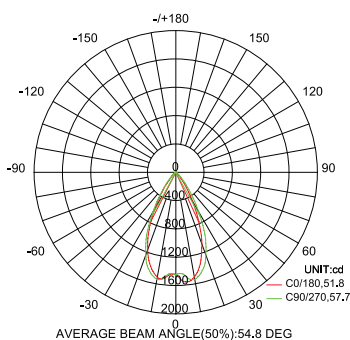

medium 36°

h (m)	E (lx)	Ø (m)
1	1218	Ø0.65
2	304.6	Ø1.30
3	135.4	Ø1.95
4	76.15	Ø2.60
5	48.74	Ø3.25

Photometric 3000K 36D Ra.90

APPLICATIONS

popular solution for many bathrooms as they offer bright directional light that can be positioned where it's needed most.


PRODUCT DESCRIPTION

Shower Downlight, and wet areas made of die cast aluminum body, trim and heat sink.

FIXTURE CONSTRUCTION

Low glare reflector, Interchangeable reflectors aluminum body, trim and heat sink. with different beam angles, IP65

Dimension Drawing

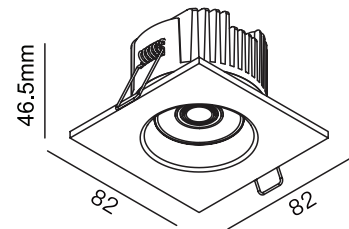

6W White Lamp Options

Part Number	CCT	B. Angle
XLSCLS6WWHC3B24	3000 K	24°
XLSCLS6WWHC3B24	4000 K	24°
XLSCLS6WWHC3B36	3000 K	36°
XLSCLS6WWHC3B36	4000 K	36°
XLSCLS6WWHC3B45	3000 K	45°
XLSCLS6WWHC3B45	4000 K	45°

6W Black Lamp Options

Part Number	CCT	B. Angle
XLSCLS6WBLC3B24	3000 K	24°
XLSCLS6WBLC3B24	4000 K	24°
XLSCLS6WBLC3B36	3000 K	36°
XLSCLS6WBLC3B36	4000 K	36°
XLSCLS6WBLC3B45	3000 K	45°
XLSCLS6WBLC3B45	4000 K	45°

10W White Lamp Options

Part Number	CCT	B. Angle
XLSCLS10WWHC3B24	3000 K	24°
XLSCLS10WWHC3B24	4000 K	24°
XLSCLS10WWHC3B36	3000 K	36°
XLSCLS10WWHC3B36	4000 K	36°
XLSCLS10WWHC3B45	3000 K	45°
XLSCLS10WWHC3B45	4000 K	45°

10W Black Lamp Options

Part Number	CCT	B. Angle
XLSCLS10WBLC3B24	3000 K	24°
XLSCLS10WBLC3B24	4000 K	24°
XLSCLS10WBLC3B36	3000 K	36°
XLSCLS10WBLC3B36	4000 K	36°
XLSCLS10WBLC3B45	3000 K	45°
XLSCLS10WBLC3B45	4000 K	45°