

Model: OLP01323680



**General Data**

Power	8 W
LED type	CREE LED
Luminous flux	370 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	180°
Dimension	Ø165x800mm
Cut out dia.	/
Weight (kgs)	4 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

**Construction Data**

IP rating	IP65 Waterproof
Housing	Aluminum lamp body
Protection finishing	Graphene powder coating finish
Glass	Tempered glass diffuser
Loading capacity	2000 kgs
Cable Gland	PG7 IP67
Gasket	Silicone rubber gasket

**Electrical Data**

Input voltage	AC 110-240V
Cable	1PC rubber cable 1M

**APPLICATIONS**

This bollard is characterized by the solid build quality and a uniform light distribution; it is suitable for the illumination of urban and residential areas, as well as for car parks and walkways. The range includes several dimensions, versions, and lighting configurations

**PRODUCT DESCRIPTION**

LED bollard luminaire for outdoor installation, aluminum body, 800mm height, Glass diffuser, stainless steel screws, Low power CREE LED, IP65 rating.


**FIXTURE CONSTRUCTION**

Aluminum body housing, Anti-corrosion Graphene powder coating finishing, Tempered glass diffuser for high loading capacity, Silicone rubber gasket. IP65 rating

**Accessories**

- Mounting Sleeve /
- Clip /

**Dimension Drawing**

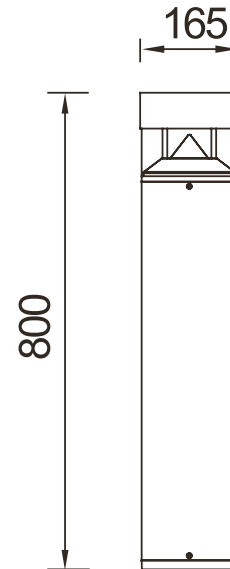


**Lamp Options**

Part Number	CCT	Beam angle
OLP01323680C3B180	3000 K	180°
OLP01323680C4B180	4000 K	180°

**Photometric Data**

Light Distribution Curve [Unit: cd]



Illumination Drawing

