


Model: SL24V4.8IP68



General Data

System Watts	4.8W
Voltage	24V
LED Distance	1.67 cm
Roll Length	5m
Max to connect	5 Rolls
Cutting Distance	10 cm
PCB Colour	White
Lumen lm	p/m 480lm
Beam angle	120°
LED Type	3528
LED Qty	p/m 60
Connection Type	Stripped wire
IP Rating	IP68

Dimension Drawing

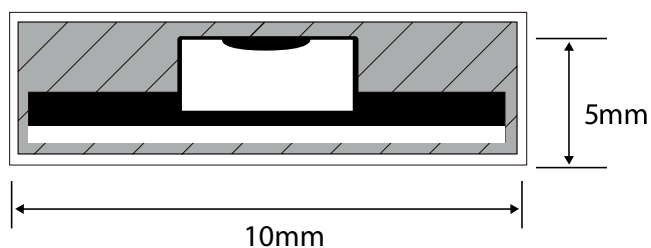

APPLICATIONS

Ideal for highlighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.








PRODUCT DESCRIPTION

LED Strip light made of LED chips, 120 deg beam angle, very slim depth and width, comes in 5 meters roll, with 3M adhesive tape.IP68.

FIXTURE CONSTRUCTION

Easy installation and removal can be connected though stripped wires, made of printed circuit and silicon covers to IP68. with 3M adhesive tape.

Strip light options

Color	Part Number	CCT
	SL24V4.8IP6827	2700K
	SL24V4.8IP683	3000K
	SL24V4.8IP684	4000K
	SL24V4.8IP686	6000K
Color	Part Number	CCT
	SL24V4.8IP68R	Red
	SL24V4.8IP68G	Green
	SL24V4.8IP68B	Blue

- Driver to be order separately
- Cable distance should be taken into consideration.

Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75W	IP 67	1 - 14 Meter Max	5 years
MW- XLG-150-24	150W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 14 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 20 Meter Max	5 years