

**Model: OLXD380306**



**General Data**

Power	24 W
LED type	CREE LED
Luminous flux	1800 lm
CCT	3000K,4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	10x 60°
Dimension	1000x38x72mm
Cut out dia.	/
Weight (kgs)	2.5 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-15~50°C
RAL Color	80+
Oper. Temp.	-15~50°C
Certifications	CE, RoHS

**Construction Data**

IP rating	66 waterproof
Housing	Aluminum alloy
Protection finishing	passivated (anodizing) anticorrosion finishing
Glass	Printing hole glass
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket
connector	male + female
Signal:	DMX

**Electrical Data**

Input voltage	DC24V
Cable	Cable gland for waterproof IP66

**APPLICATIONS**

These lights are widely used in exterior applications, such as Facade lighting, architectural features, lighting columns, walls, as well as landscape features, gardens, parks, etc.

**PRODUCT DESCRIPTION**

Surface-mounted linear slim wall washer luminaire for outdoor installation, length 1,000mm, Aluminum alloy body housing. Remote driver needed, Low power CREE LED, IP66 rated


**FIXTURE CONSTRUCTION**

Aluminum alloy light body with Printing hole glass and Angle Bracket Adjustable with Built-in damping, silicone gasket seal and cables with waterproof connector male + female IP66 rated.

**Accessories**

Bracket	Angle Bracket
Clip	/

**Dimension Drawing**

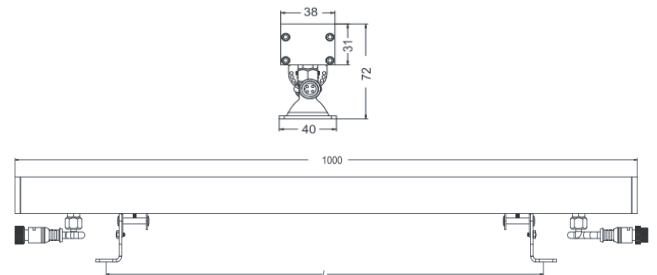

**Lamp Options**

Part Number	CCT	Beam angle
OLXD380306C3B10X60	3000 K	10x 60°
OLXD380306C4B10X60	4000 K	10x 60°

**Photometric Data**

Light Distribution Curve

