


# XL marlin Lighting


Magnetic Surface mounted track ( XLCTMNMX) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: XLCTMNMX
2. Rated Voltage: DC48V
3. IP Grade: IP20
4. Dimension: (1000/2000)\*26.7\*42mm

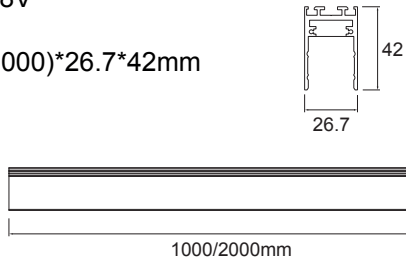


Power Connector

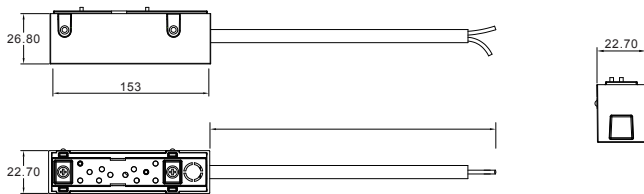


- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


1. Prepare and connect power supply

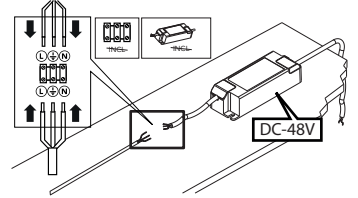


2. Connect power supply power Connector power supply power connector through the track

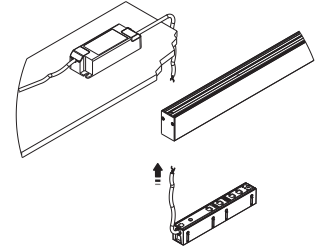


3. Fix the track to the ceiling using provided screws

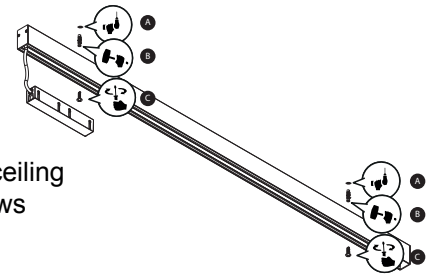

4. Push the power connector into the track

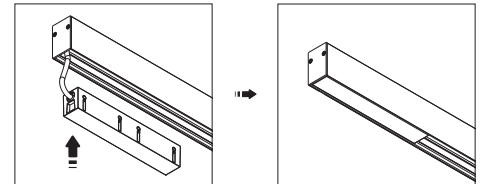

5. Attach your desired Magnetic track light

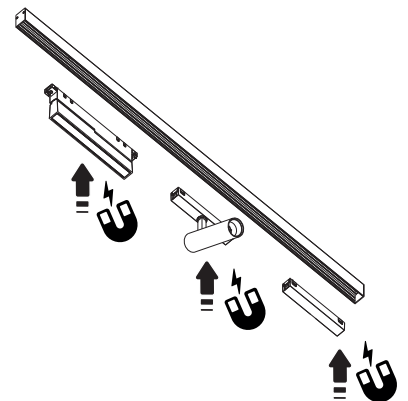

The light source of this luminaire is not replaceable; when the source reaches its end of life the whole luminaire shall be replaced



Welcome you again to buy our products

# XL marlin Lighting


Magnetic Rimless track ( XLCTMNWX) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: XLCTMNWX
2. Rated Voltage:DC48V
3. IP Grade: IP20
4. Dimension: (1000/2000)\*57\*42mm
5. Cut out size 38mm\*(1000mm/2000mm)

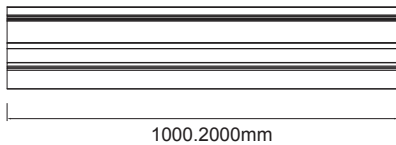


## Power Connector

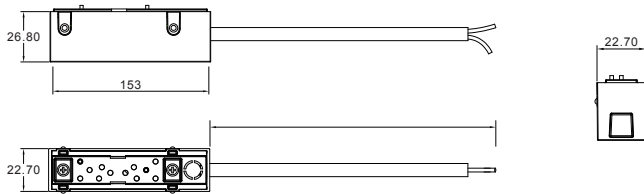


- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


## 1. Cut ceiling panel

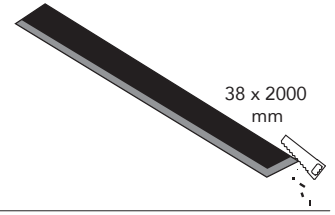


2. After the power is cut off, the track power line is connected to the DC 48V power supply

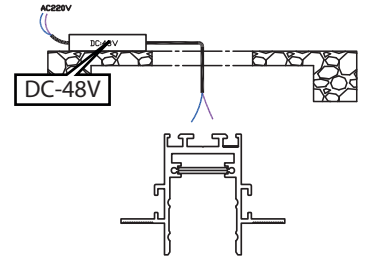

3. There are mounting holes on both sides of the track, which are fixed with screws

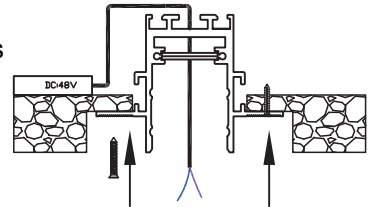

- 4-(A) After the track is fixed, the track needs to be energized and tested.

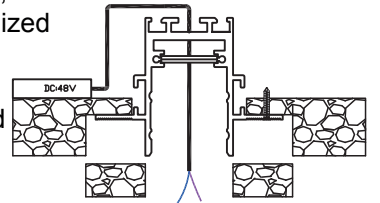


- 4-(B) The track is energized and tested normally, and then the board is sealed.

- 4-(C) Brush the gap between the ceiling on the track and make sure it does not fall into the track. And clean up all the debris in the track.


**NO FOREIGN MATTER IN THE TRACK GROOVE**

- 5.(A) Connect the power Connector to the DC 48V power supply

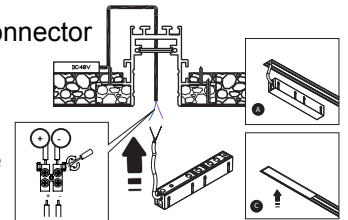

- 5.(B) Push the power connector in the track groove

6. Attach your desired Magnetic track light

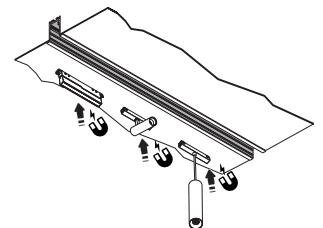

The light source of this luminaire is not replaceable; when the source reaches its end of life the whole luminaire shall be replaced



Welcome you again to buy our products

# XL marlin Lighting


Magnetic Recessed track ( XLCTMNZX) Installation Instruction

The user: thank you for your purchase use this product, read this instruction manual before usage

1. Model: XLCTMNZX
2. Rated Voltage:DC48V
3. IP Grade: IP20
4. Dimension: (1000/2000)\*57\*42mm
5. Cut out size 38mm\*(1000mm/2000mm)

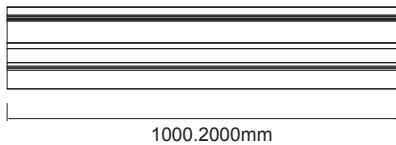


## Power Connector

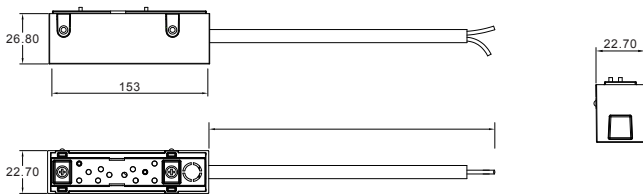


- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


1. Cut ceiling panel

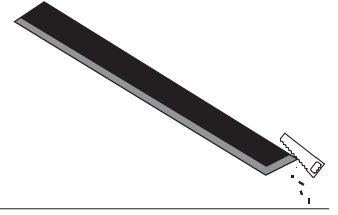


2. After the power is cut off, the track power line is connected to the DC 48V power supply

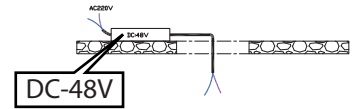


3. Insert the track in the opening you made in the panel




4. Connect the power Connector to the DC 48V power supply

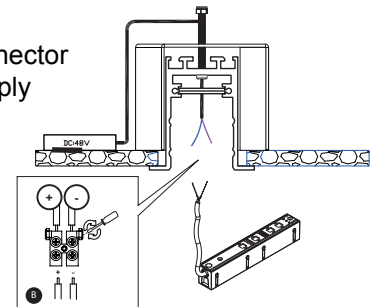


5. Push the power connector in the track groove

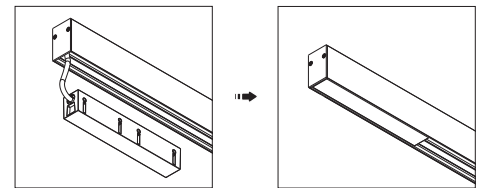

5. Tighten the screw to fix the track in place

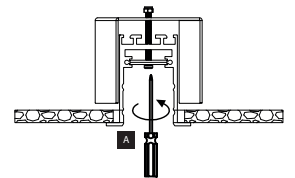

6. Attach your desired Magnetic track light

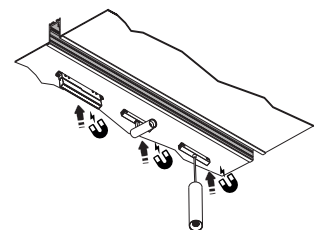

The light source of this luminaire is not replaceable; when the source reaches its end of life the whole luminaire shall be replaced

Welcome you again to buy our products