

Model: XLWPGH106M
Weatherproof-Linear



General Data

Lamp Type	SMD2835
System Watts	20 W
Lumens	2500 lm/2600 lm
Lamp Life	50000 hrs
CRI	>80 Ra
Beam Angle	120°
IP Rating	IP 65
Voltage	220-240V
CCT	4000/6500K
Oper. temp.	-20 to +40
Dimension	580x95x75mm

Construction Data

IP rating	IP 65 Outdoor
Housing	PC housing resistant to UV & impacts
Protection finishing	/
Cover	Opal PC cover with light diffusing agent
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	220-240V 50/60HZ
Cable	/

Accessories

Mounted Accessory	/
Clip	/

APPLICATIONS

Ideal for general lighting indoors or outdoors, Warehouse, Refrigeration Storage, Parking lot, Factory, Tunnel, Bathroom, etc.


PRODUCT DESCRIPTION

Surface mounted or suspended mounted LED Weatherproof light, IP65, Opal PC cover with light diffusing agent, PC housing resistant to UV & impacts body with SS clips.

FIXTURE CONSTRUCTION

PC housing resistant to UV & impacts body with SS clips Opal PC cover with light diffusing agent.

Dimension Drawing

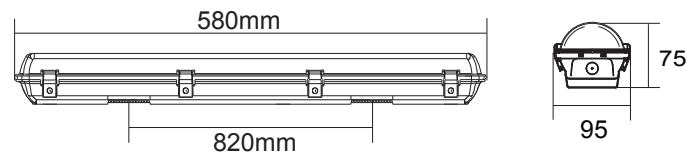


Lamp Options

Part Number	CCT
XLWPGH106M4	4000 K
XLWPGH106M6	6500 K

Photometric Data

Light Distribution Curve [Unit: cd]

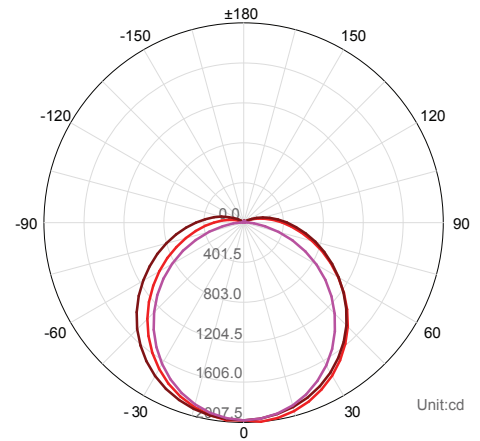

Beam angle

