

Model: FOS28SL3 FOS Focus



General Data

Power	28 W
LED type	COB
Luminous flux	2500 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	15°/24°/36°/60°
Color	White/Grey/black
Lamp Life	50000 hrs
SDCM	≤5
Oper. Temp.	C -25° +40°
Certifications	CE, RoHS
Dimming	1-10V/DALI


Construction Data

IP rating	20 Indoor
Housing	Solid aluminum housing CNC machined body
Protection finishing	passivated (anodizing) anti-corrosion finishing
Glass	Tempered glass diffuser

Electrical Data

Input voltage	AC 100-240 V
Cable	/

Dimension Drawing

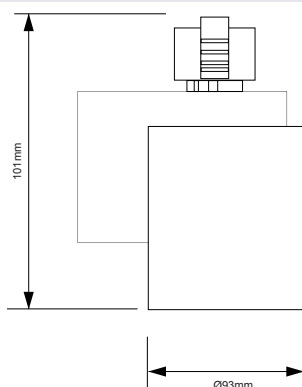

APPLICATIONS

Ideal for application where comfort and nice atmosphere is required. Its widely applied to retail lighting and other high-end commercial areas.

PRODUCT DESCRIPTION

28W Three circuit spot light. Easy installation and removal from track. Optimal thermal dissipation. adjustable up to 350° and up to 90° vertically. CCT, 3000K, 4000K, and beam angles, 15°/24°/36°/60°

FIXTURE CONSTRUCTION

Made of die cast aluminum body and heat sink and aluminum reflector. The adaptor locks the spotlight positively to the track, LED light source, PC gear box and electronic non dimmable driver. comes in white, black and silver

White Lamp Options

Part Number	CCT	Beam angle
FOS28SL3WH312	3000 K	15°
FOS28SL3WH412	4000 K	15°
FOS28SL3WH324	3000 K	24°
FOS28SL3WH424	4000 K	24°
FOS28SL3WH336	3000 K	36°
FOS28SL3WH436	4000 K	36°
FOS28SL3WH360	3000 K	60°
FOS28SL3WH460	4000 K	60°

Black Lamp Options

Part Number	CCT	Beam angle
FOS28SL3BL312	3000 K	15°
FOS28SL3BL412	4000 K	15°
FOS28SL3BL324	3000 K	24°
FOS28SL3BL424	4000 K	24°
FOS28SL3BL336	3000 K	36°
FOS28SL3BL436	4000 K	36°
FOS28SL3BL360	3000 K	60°
FOS28SL3BL460	4000 K	60°

Grey Lamp Options

Part Number	CCT	Beam angle
FOS28SL3GR312	3000 K	15°
FOS28SL3GR412	4000 K	15°
FOS28SL3GR324	3000 K	24°
FOS28SL3GR424	4000 K	24°
FOS28SL3GR336	3000 K	36°
FOS28SL3GR436	4000 K	36°
FOS28SL3GR360	3000 K	60°
FOS28SL3GR460	4000 K	60°

Photometric Data

Light Distribution Curve [Unit: cd]

