

Model: OLPFL




General Data

Power	35W/60W/100W
LED type	Cree, Osram LED
Luminous flux	120 lm/W
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	70/80
Beam angle	90°
Dimension	Ø520x 500mm
Lamp Life	50000 hrs
SDCM	≤5
Body colour	Grey, Black
Oper. Temp.	-30 °C up to +50 °C
Certifications	CE, RoHS
Input voltage	AC 100-270V, 50/60Hz

Construction Data

IP rating	IP65 Waterproof
Installation Pipe	Ø60mm
Housing	Aluminum lamp body
Housing finish	Polyester powder coating
Optic	Polycarbonate
Impact resistance	IK 08
Protector	PC
Driver	Meanwell

Photometric Data

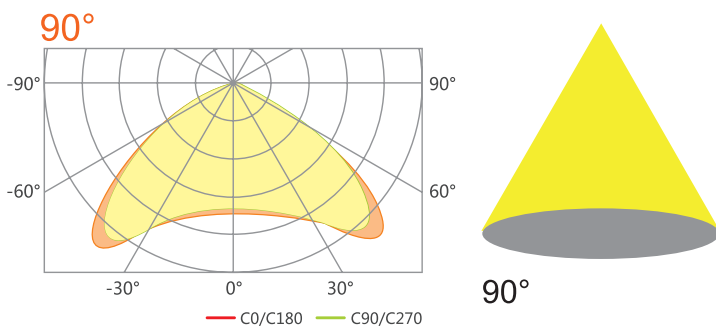

APPLICATIONS

Simple appearance, easy to integrate with the environment. Specially designed for squares, parks and gardens areas.


PRODUCT DESCRIPTION

Reinforced die-casting body and reflector, smooth self-cleaning surface, nice appearance design And strong structure design. High efficient integrated heat radiation design, Electrostatic powder painting, high strength anti-corrosion, long lifespan. Plug type waterproof design, Waterproof more durable and effectively, Up to IP65.

FIXTURE CONSTRUCTION

Aluminium lamp body; Polycarbonate Optic, Polyester powder coating Housing finish with PC Protector, Meanwell Driver band and IP65

Dimension Drawing



Symetrical Beam angle


Lamp options (Black)

Part Number	Watts	CCT
OLPFLS35WC3B	35W	3000K
OLPFLS35WC4B	35W	4000K
OLPFLS60WC3B	60W	3000K
OLPFLS60WC4B	60W	4000K
OLPFLS100WC3B	100W	3000K
OLPFLS100WC4B	100W	4000K

Lamp options (Grey)

Part Number	Watts	CCT
OLPFLS35WC3G	35W	3000K
OLPFLS35WC4G	35W	4000K
OLPFLS60WC3G	60W	3000K
OLPFLS60WC4G	60W	4000K
OLPFLS100WC3G	100W	3000K
OLPFLS100WC4G	100W	4000K

POLE Length

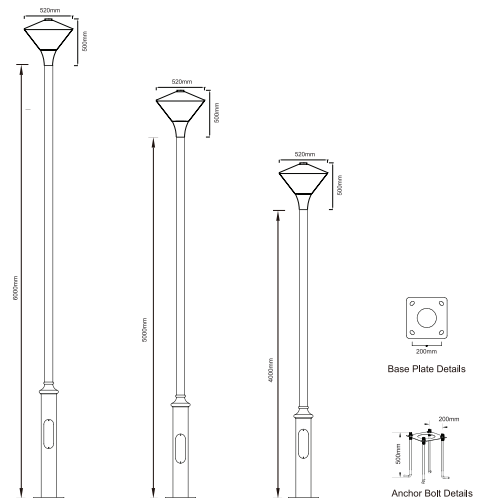

Pole options (Black)

(Black)	Pole Length
OLP400B	4000mm
OLP500B	5000mm
OLP600B	6000mm

(Grey)	Pole Length
OLP400G	4000mm
OLP500G	5000mm
OLP600G	6000mm