

Model: OLB803073



General Data

Power	12 W
LED type	COB LED
Luminous flux	760lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	80+
Beam angle	40°, 46°
Dimension	Ø108x156x180mm
Cut out dia.	/
Weight (kgs)	1.2 kgs
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-40°-45°
RAL Color	80+
Oper. Temp.	-30°-45°
Certifications	CE, RoHS

Construction Data

IP rating	IP65 Waterproof
Housing	Cast aluminum body
Protection finishing	Graphene powder coating finish
Glass	Tempered glass
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

Electrical Data

Input voltage	AC110~240V
Cable	Cable gland for waterproof IP65

APPLICATIONS

These lights are widely used in exterior applications, such as Facade lighting, columns, walls, architectural features, landscape features for hotels, as well as residential applications, etc.

PRODUCT DESCRIPTION

Surface-mounted wall luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power COB LED, IP65 rating.

FIXTURE CONSTRUCTION


Cast aluminum body, with passivated (anodizing) anticorrosion finishing, stainless steel screws, silicon seal gaskets and cable gland for waterproof IP65

Accessories

Mounting Sleeve /

Clip /

Dimension Drawing

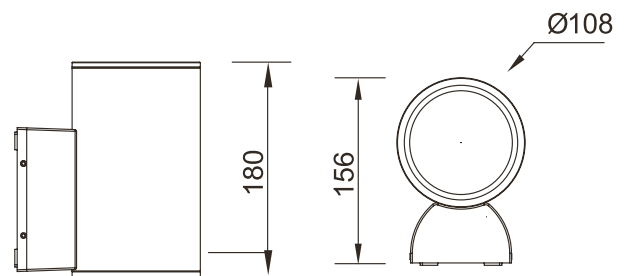


Lamp Options

Part Number	CCT	Beam angle
OLB803073C3B40	3000 K	40°
OLB803073C4B40	4000 K	40°
OLB803073C3B46	3000 K	46°
OLB803073C4B46	4000 K	46°

Photometric Data

Light Distribution Curve [Unit: cd]



Illumination Drawing

