

Model: XLAL99D





Lamp Data

Model No.	XLAL99DS Small	XLAL99DM Medium	XLAL99DL Large
Dimension	Ø400x86mm	Ø600x86mm	Ø800x86mm
Cutout	Ø220~250mm	Ø385~415mm	Ø385~415mm
Input Voltage	AC 220-240V 50/60 Hz OSRAM Driver		
Power	40W	60W	75W
Light Efficiency	3600-4200lm	5700-6660lm	6700-8000lm
CCT	3000K~4000K~5700K color changeable by dip switch		
CRI	≥80		
Beam Angle	120°		
Dimming Option	On/Off Standard DALI Optional		
Installation	Surface / Recessed / Suspended		
Lamp life	50000 hrs		
SDCM	<5		
Product Color	White RAL 9016 / Black RAL 9005 / Wood grain		

Construction Data

IP rating	IP40 Indoor
Housing	Aluminium
Diffuser,	Opal diffuser / Micro Prismatic Diffuser

Photometric Data

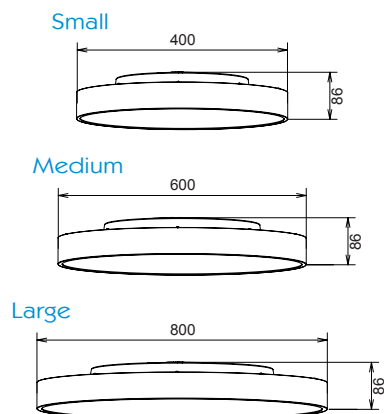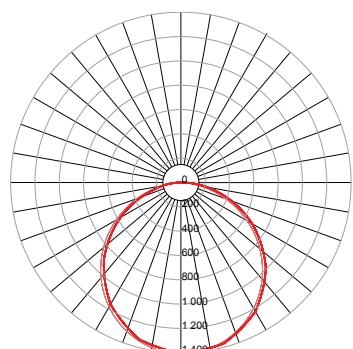

APPLICATIONS

Ambient lighting is designed for general lighting applications in office, super-market, shop, school, hotel, etc.

PRODUCT DESCRIPTION

Slim aluminum designed ambient light with many choices of installations, surface, recessed and pendent, with opal or micro prismatic diffuser with switchable lamp color warm neutral and cool white .

FIXTURE CONSTRUCTION

Aluminum housing provides an excellent thermal management. Size options: 400mm, 600mm, 800mm, multiple installation ways available which meets more application demands.

(S) Small lamp options

Part Number	Lamp Color
XLAL99DSWH	White
XLAL99DSBL	Black
XLAL99DSWG	Wood grain


(M) Medium lamp options

Part Number	Lamp Color
XLAL99DMWH	White
XLAL99DMBL	Black
XLAL99DMWG	Wood grain

(L) Large lamp options

Part Number	Lamp Color
XLAL99DLWH	White
XLAL99DLBL	Black
XLAL99DLWG	Wood grain

Installation

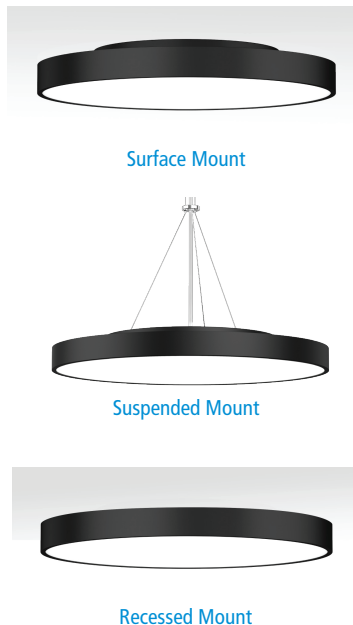

Accessory

