



### Model: NF1615T

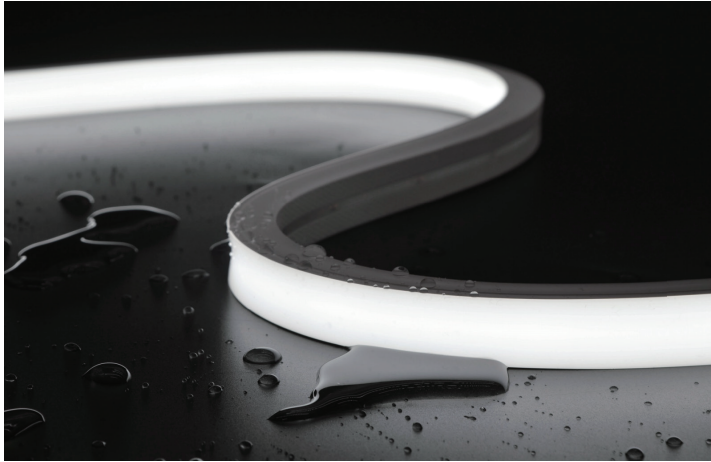

#### General Data

<b>Model Number</b>	NF1615T5W	NF1615T12W
<b>Power</b>	5w/m	12w/m
<b>Dimension</b>	15x16mm	
<b>Roll Length</b>	5m	
<b>Luminous</b>	84lm/w	
<b>CCT</b>	3000K/4000K/6000K/Red/Green/Blue/RGB/RGBW	
<b>CRI</b>	≥90	
<b>Color</b>	White	
<b>SDCM</b>	≤3	
<b>Oper. Temp.</b>	-25°C~60°C	
<b>IP Rating</b>	IP67	
<b>Input voltage (V)</b>	24V	
<b>Certifications</b>	CE, RoHS	

#### Accessory

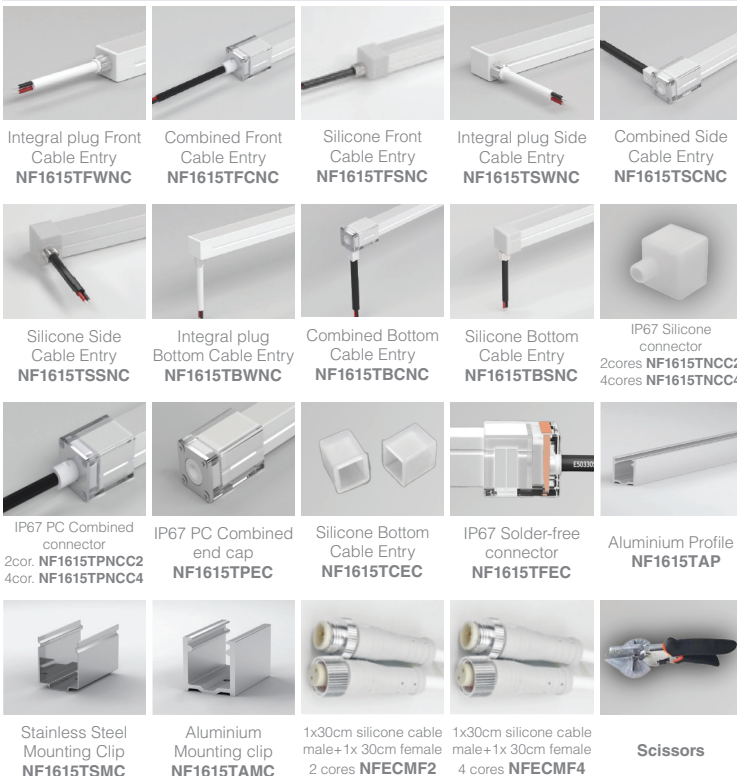

#### APPLICATIONS

deal for high lighting cove lights, wall back light, mirror back light, and staircase lighting for retail, commercial and domestic applications.


#### PRODUCT DESCRIPTION

With top bend, to meet the request of the different space bend.

#### FIXTURE CONSTRUCTION

High light transmittance, environmental protection grade silicone material, integrated extrusion molding process. With Unique optical light distribution structure design, uniform lighting surface and no shadow. IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV Excellent toughness, simple and stylish appearance, delicate and unique

#### Vertical (Top) Bend

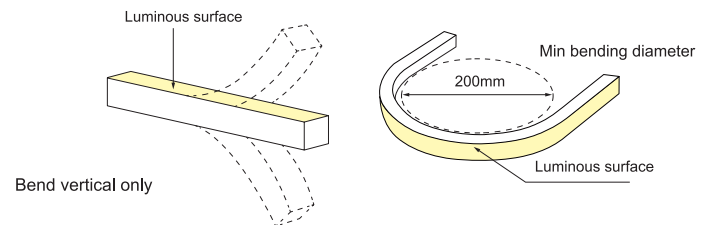

#### Top Bend 5W Neon Flex Options

Part Number	CCT
<b>NF1615T5WC3</b>	3000 K
<b>NF1615T5WC4</b>	4000 K
<b>NF1615T5WC6</b>	6000 K
<b>NF1615T5WCR</b>	Red
<b>NF1615T5WCG</b>	Green
<b>NF1615T5WCB</b>	Blue
<b>NF1615T5WCRGB</b>	R/G/B
<b>NF1615T5WCRGBW</b>	R/G/B/W

#### Top Bend 12W Neon Flex Options

Part Number	CCT
<b>NF1615T12WC3</b>	3000 K
<b>NF1615T12WC4</b>	4000 K
<b>NF1615T12WC6</b>	6000 K
<b>NF1615T12WCR</b>	Red
<b>NF1615T12WCG</b>	Green
<b>NF1615T12WCB</b>	Blue
<b>NF1615T12WCRGB</b>	R/G/B
<b>NF1615T12WCRGBW</b>	R/G/B/W


#### 5W Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75W	IP 67	1 - 14 Meter Max	5 years
MW- XLG-150-24	150W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 14 Meter Max	5 years
MW- ELG-150-24	150 W	IP 67	1 - 20 Meter Max	5 years

#### 12W Driver: Constant Voltage Output

Driver Code	Watt	IP rate	Meter	Warranty
MW- XLG-75-24	75 W	IP 67	1 - 7 Meter Max	5 years
MW- XLG-240-24	240 W	IP 67	1 - 20 Meter Max	5 years
MW- ELG-75-24	75 W	IP 67	1 - 7 Meter Max	5 years
MW- ELG-240-24	240 W	IP 67	1 - 20 Meter Max	5 years

#### Photometric Data

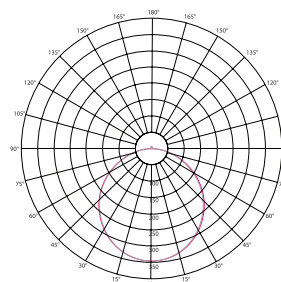

#### Dimension

